

SENCO[®]



XTREMEPRO SERIES

PRO SERIES

PALLETPRO SERIES

SEMIPRO SERIES

**COMPRESSORS,
KITS &
ACCESSORIES**

CORDLESS

FASTENERS

DURASPIN

SENCO CATALOGUE

2014



SENCO INTRODUCTION

Senco is one of the most recognised brands in the world of pneumatic fastening systems and produces a wide range of pneumatic, electric, gas and battery powered fastening tools.

Senco fastening tools are divided into series ranges: XtremePro, Pro, Semi-Pro, PalletPro and the unique DuraSpin collated fastening system. Every tool delivers top level performance.

In additionally, there is the cordless range of nailers and pinners based on the unique Fusion technology and a gas powered tools. Senco also offer a complete range of high quality compressors, pneumatic screwdrivers and drills.

Senco Tools support a wide range of high quality fasteners designed to meet all industry standards and application requirements.

INDEX

CHAPTER	PAGE
Senco Introduction	2
Icons	6
Product lines for each application	7
XtremePro series	8 - 21
Pro series	22 - 41
PalletPro series	42 - 47
SemiPro series	48 - 53
Compressors, kits & accessories	54 - 63
Cordless	64 - 71
Fasteners	72 - 85
Coding chart	86 - 91
DuraSpin	92 - 103

**USE SENCO TOOLS**



**THINK FAST,
THINK DURASPIN.**



NEW!

CORNER FIT ACCESS

**TOOL FREE ADJUSTABLE
NOSE PIECE**

HIGH TORQUE MOTOR

VARIABLE SPEED TRIGGER



SENCO COLLATED SCREW SYSTEM

**LOOKS CHANGE WITH TIME,
ESSENCE REMAINS THE SAME**



Senco is continually evolving. Following the successful introduction of the new Fusion and DuraSpin tools it's now time to improve the look of the pneumatic tool product line.



1973



1993



2013

NOW EVEN MORE RECOGNIZABLE

XtremePro Series

Red body colour, matching Senco brand image
Red cap, grey accent
Cast & ground Senco logo

Pro Series

Red body colour, matching Senco brand image
Grey differentiating cap
Heavy duty Senco logo sticker

Trigger function visible with colour:


- Grey - restrictive/sequential trigger
- Red - selectable/switchable trigger
- Black - contact/dual action trigger




USE SENCO TOOLS


ICONS

-  **WOOD CONSTRUCTION**
Carpentry, timber frame construction, remodeler solutions such as battens, mouldings, constructive connections, thermal insulation systems, frame connections, steel sheets, shingles, flooring.
-  **DRYWALL**
Screw connections in the static and nonstatic applications such as gypsum board to metal or wood, gypsum fibre boards on wood substructure, sound insulation.
-  **GENERAL JOINERY**
Carpentry, assembly, stair construction, windows, doors, interior design, furniture boards, panelling, profile boards, panels, tongue & groove, furniture, flooring, ceiling, wall fittings, decking, glazing bead.
-  **DISPLAY**
Exhibition construction, point of sale items, packaging, display boxes, upholstery work, fixing fabrics, leather.
-  **FURNITURE**
Furniture frames, drawer assembly, cabinets, upholstery.
-  **PALLET INDUSTRY**
Manufacture and repair of boxes, box parts, stalls, single and multiple-way pallets, product and shipping packaging.
-  **ROOFING/SHEATHING**
Substructures, panels, facade and roof production, roof and facade shingles, slides, roof panels.
-  **AUTOMOTIVE**
Seat manufacture, upholstery.
-  **UPHOLSTERY**
For the fixing of foam and textiles to each other or on other substrates.
-  **PACKAGING**
Packaging, boxes, crates, cardboard packaging.
-  **BEDDING**
Divan, Mattress and Headboard manufacturing
-  **STEEL**
Steel applications
-  **CONCRETE**
Concrete applications

 All Senco EMEA. Tools are marked with the CE-mark, and therefore meet the strict European CE regulations. On request we can provide you with specific sound and vibration information of specific tools.

 **1 year limited warranty** after date of purchase and applies to defects in material and production, excluding wearing parts, problems due to lack of maintenance, overload and usage of non-Senco parts and/or fasteners.

 **2 year limited warranty** after date of purchase and applies to defects in material and production, excluding wearing parts, problems due to lack of maintenance, overload and usage of non-Senco parts and/or fasteners.

 **5 year limited warranty** after date of purchase and applies to defects in material and production, excluding wearing parts, problems due to lack of maintenance, overload and usage of non-Senco parts and/or fasteners.

 **The tool will be delivered in a case**

 **The tool is also available in a case**

 **The tool is powered by a fuel cell**

 **Oil free**

PRODUCTLINE FOR EVERY APPLICATION



XTREMEPRO SERIES

Xtreme quality for industrial applications. Elite tools built with the highest quality for 24/7 use in the toughest industrial environments. Features of these top of the line tools are: upgraded internal design for maximum durability and performance.



PRO SERIES

Professional tools designed for lower volume professional end-users. Designed without compromise for professional use at a lower volume. The tools in the Pro Series reflect Senco's 60 year reputation in reliability and performance.



PALLETPRO SERIES

Specifically designed for long-term usage in the pallet and packaging industry. The tools in the PalletPro Series are perfectly balanced and very powerful, which enables long-term use. Features of the PalletPro Series are: rapid fire with a superb reliability, with low maintenance.



SEMIPRO SERIES

Senco quality for the low volume user. The SemiPro Series is specifically designed for professional use in home and garden applications, where tools are not used with a high frequency.



SENCO COMPRESSORS

For every application there's a Senco compressor. In addition to high quality professional tools, Senco also has a complete range of high quality compressors. There are oil-less and oil lube versions available for a wide range of applications. Senco compressors are designed to run at least 3.000 hours, leaving the competition behind.



CORDLESS

Cordless convenience, pneumatic power. Senco nailers with Fusion Technology use compressed air that is permanently sealed in the tool's self-contained, built-in cylinder to unleash a shot of pure, portable pneumatic power every time you pull the trigger. There's no ramp up time and virtually no cleaning or servicing costs



FASTENERS

Senco fasteners guarantee a fault-free use of Senco tools and a perfect finish. All Senco fasteners are produced according to international standards, like CE.



DURASPIN

Collated screw fastening systems. The DuraSpin Collated Screw Fastening System Family is the professionals' choice for demanding drywall and wood fastening applications. The perfect solution for high productivity screwing as well as a single man operation. Senco DuraSpin will dramatically increase your productivity.

Elite tools built with the highest quality for 24/7 use in the toughest industrial environments. Features of these top of the line tools are: upgraded internal design for maximum durability and performance.



SENCO[®]

**XTREMEPRO
SERIES**

Xtreme quality for
industrial applications



5 YEAR
LIMITED
WARRANTY

XTREME
PRO
SERIES

USE SENCOTOLS

STAPLERS

LIGHT WIRE STAPLER SFT10XP



TECHNICAL INFORMATION

Length	218 mm
Width	42 mm
Height	167 mm
Weight	1,0 kg
Actuation	TF/Automatic
Air inlet	1/4" NPT
Operating pressure	4,1-6,5 bar
Air consumption	19,8 l/min
Magazine capacity	180

APPLICATIONS

Upholstering operations, furniture assembly, cabinets, interior trim, bedding manufacture, picture frames, molding and roofing felt

FEATURES

- One-handed magazine opening
- Rear exhaust
- Comfort grip
- Short trigger stroke

DESCRIPTION

DESCRIPTION	ART. NR.
SFT10XP A/D TF	6S2001N
SFT10XP B TF	6S2011N
SFT10XP B Auto	6S2111N
SFT10XP C TF	6S2021N
SFT10XP C Auto	6S2121N
SFT10XP E TF	6S2031N
SFT10XP F TF	6S2041N
SFT10XP G TF	6S2051N
SFT10XP AT TF	6S2061N
SFT10XP AT Auto	6S2161N



LIGHT WIRE STAPLER SFT10XP-DL



TECHNICAL INFORMATION

Length	375 mm
Width	42 mm
Height	167 mm
Weight	1,0 kg
Actuation	TF/Automatic
Air inlet	1/4" NPT
Operating pressure	4,1-6,5 bar
Air consumption	19,8 l/min
Magazine capacity	390

APPLICATIONS



Upholstering operations, furniture assembly, cabinets, interior trim, bedding manufacture, picture frames, molding and roofing felt

FEATURES

- One-handed magazine opening
- Rear exhaust
- Comfort grip
- Short trigger stroke
- Double length magazine

DESCRIPTION

DESCRIPTION	ART. NR.
SFT10XP B TF D/L Magazine	6S2211N
SFT10XP C TF D/L Magazine	6S2221N
SFT10XP C Auto D/L Magazine	6S2321N
SFT10XP F Auto D/L Magazine	6S2341N
SFT10XP G Auto D/L Magazine	6S2351N
SFT10XP AT Auto D/L Magazine	6S2361N

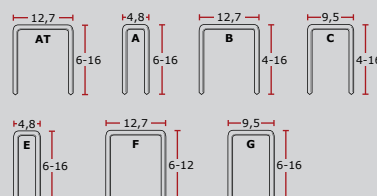



SENCO®

LIGHT WIRE STAPLER SFT10XP-LN



MEDIUM WIRE STAPLER SLS20XP



MEDIUM WIRE STAPLER SLS25XP



TECHNICAL INFORMATION

Length	305 mm
Width	51 mm
Height	218 mm
Weight	1,0 kg
Actuation	TF/Automatic
Air inlet	1/4" NPT
Operating pressure	4,1-6,5 bar
Air consumption	19,8 l/min
Magazine capacity	180

APPLICATIONS

Upholstering operations, furniture assembly, cabinets, interior trim, bedding manufacture, picture frames, molding and roofing felt

FEATURES

- One-handed magazine opening
- Rear exhaust
- Comfort grip
- Short trigger stroke
- For deep reach applications

DESCRIPTION

DESCRIPTION	ART. NR.
SFT10XP C - long nose	6S2421N
SFT10XP AT - long nose	6S2461N



TECHNICAL INFORMATION

Length	305 mm
Width	51 mm
Height	216 mm
Weight	1,1 kg
Actuation	BF (TF)
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	54 l/min
Magazine capacity	168

APPLICATIONS


Furniture, cabinets, paneling, upholstery, siding, fencing

FEATURES

- Oil free
- Lightweight
- Ergonomic design
- No-Mar pad
- Depth adjustment
- Comfort Grip

DESCRIPTION

DESCRIPTION	ART. NR.
SLS20XP-K BF(TF)	492026N
SLS20XP-L BF(TF) + Case	492023N
SLS20XP-M BF(TF) + Case	492024N
SLS20XP-M BF/Auto	492009N
M SENCOMATIC	49009N
L SENCOMATIC	MD0023



TECHNICAL INFORMATION

Length	305 mm
Width	51 mm
Height	229 mm
Weight	1,2 kg
Actuation	BF (TF)
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	54 l/min
Magazine capacity	168

APPLICATIONS


Furniture, cabinets, paneling, upholstery, siding, fencing

FEATURES

- Oil free
- Lightweight
- Ergonomic design
- Suitable for high volume production environments
- Depth adjustable


DESCRIPTION

DESCRIPTION	ART. NR.
SLS25XP-L BF(TF)	822009N
SLS25XP-M BF(TF)	822010N



STAPLERS

MEDIUM WIRE STAPLER SKSXP

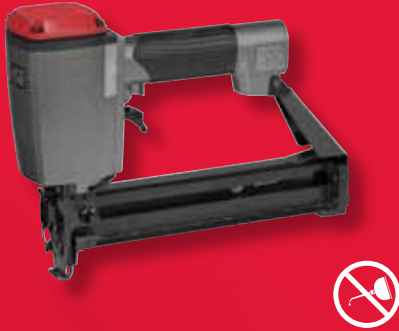

HEAVY WIRE STAPLER SHS50XP



HEAVY WIRE STAPLER SHS51XP



TECHNICAL INFORMATION

Length	314 mm
Width	51 mm
Height	238 mm
Weight	1,9 kg
Actuation	BF (TF)
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	61 l/min
Magazine capacity	160

APPLICATIONS


Furniture, cabinets, paneling, upholstery, sidings, doors & window casings

FEATURES

- Oil free
- Lightweight
- Low maintenance
- Only 2 moving O-rings
- Long 25mm lip to get into tight spots

DESCRIPTION

DESCRIPTION	ART. NR.
SKSXP-L BF/TF	302020N
SKSXP-L TF	302028N
SKSXP-M BF/TF	302052N
SKSXP-M TF	302060N
SKSXP-N BF/TF	302084N



TECHNICAL INFORMATION

Length	381 mm
Width	89 mm
Height	279 mm
Weight	2,3 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8 - 8,3 bar
Air consumption	113 l/min
Magazine capacity	160

APPLICATIONS


Sheathing, furniture framing, subflooring, crate & box assembly, pallets, shingles

FEATURES

- 15% more powerful than all other construction staplers in its class
- Adjustable depth of drive
- Better balance
- All metal magazine
- 25mm lip length for access into tight corners

DESCRIPTION

DESCRIPTION	ART. NR.
SHS50XP-N(O) TF/BF	7B2001N



TECHNICAL INFORMATION

Length	381 mm
Width	102 mm
Height	279 mm
Weight	2,4 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8 - 8,3 bar
Air consumption	136 l/min
Magazine capacity	160

APPLICATIONS


Sheathing, furniture framing, subflooring, crate & box assembly, pallets, shingles

FEATURES

- 20% more powerful than the SHS50XP
- Adjustable depth of drive
- Better balance
- All metal magazine
- 25mm lip length for access into tight corners

DESCRIPTION

DESCRIPTION	ART. NR.
SHS51XP-N(O) TF/BF	7C2001N



HEAVY WIRE STAPLER SNS50XP



HEAVY WIRE STAPLER SQS55XP



TECHNICAL INFORMATION

Length	365 mm
Width	92 mm
Height	305 mm
Weight	2,7 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	5,5-8,3 bar
Air consumption	185 l/min
Magazine capacity	160

APPLICATIONS

Framework, sub-floors, sheathing, furniture framing, pallets, cedar shingles, crates, fascia & soffits

FEATURES


- Robust design for intensive use
- Adjustable power
- Adjustable depth of drive
- Up to 15 shots per sec.
- Reload indicator

DESCRIPTION

SNS50XP BF/TF-63mm

ART. NR.

XL3057



TECHNICAL INFORMATION

Length	365 mm
Width	92 mm
Height	305 mm
Weight	2,7 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	5,5-8,3 bar
Air consumption	185 l/min
Magazine capacity	130

APPLICATIONS

Framework, sub-floors, lathing, plate material, furniture hulls, pallets, crates, decking

FEATURES

- Rugged dependability
- Adjustable exhaust
- Adjustable depth of drive
- Up to 15 shots per sec.
- EZ-Clear Nose

DESCRIPTION

SQS55XP BF/TF

ART. NR.

662001N

SQS55XP TF

662002N

SQS55XP Automatic


EJ00300

SQS55XP-S BF/TF-90mm

XL3089

SQS55XP-S TF-90mm

XL3089R



STAPLERS / STRIPNAILERS

WIDE CROWN STAPLER WC150XP



WIDE CROWN STAPLER WC200XP



BRAD NAILER 1,2MM SLP20XP



TECHNICAL INFORMATION

Length	387 mm
Width	80 mm
Height	254 mm
Weight	2,3 kg
Actuation	BF (TF)
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	90 l/min
Magazine capacity	160

APPLICATIONS


Lathing, roof and wall felt, furniture, frames, cardboard onto pallets, packaging, insulation board, butt joints

FEATURES

- Rugged design
- Lightweight
- Adjustable depth of drive
- Large staple capacity
- EZ-Clear Nose

DESCRIPTION

DESCRIPTION	ART. NR.
WC150XP BF/TF	4W2001N
Block out kit for short staples (P08-P11)	YK0786
Pogostick	VC0371



TECHNICAL INFORMATION

Length	387 mm
Width	80 mm
Height	254 mm
Weight	2,4 kg
Actuation	BF (TF)
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	97 l/min
Magazine capacity	160

APPLICATIONS


Lathing, roof and wall felt, furniture, frames, cardboard onto pallets, packaging, insulation board, butt joints

FEATURES

- Rugged design
- Lightweight
- Adjustable depth of drive
- Large Staple capacity
- EZ-Clear Nose

DESCRIPTION

DESCRIPTION	ART. NR.
WC200XP BF/TF	4Y2001N
Pogostick	VC0371



TECHNICAL INFORMATION

Length	241 mm
Width	50 mm
Height	210 mm
Weight	1,0 kg
Actuation	TF
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	54 l/min
Magazine capacity	110

APPLICATIONS


Mouldings, furniture decoration, glass slats, cabinets and drawer cabinets, rattan furniture, finishing

FEATURES

- Oil free
- Lightest on the market in its class
- Easy to maintain
- Adjustable depth of drive
- EZ-Clear Nose

DESCRIPTION

DESCRIPTION	ART. NR.
SLP20XP TF	432001N





SENCO®

BRAD NAILER 1,2MM SBN10XP

NEW



BRAD NAILER 1,2MM SLP20XP GLN



NO OIL
INCLUDES CASE

BRAD NAILER 1,2MM FINISHPRO25XP



NO OIL
INCLUDES CASE



TECHNICAL INFORMATION

Length	255 mm
Width	42 mm
Height	167 mm
Weight	0,9 kg
Actuation	TF
Air inlet	1/4" NPT
Operating pressure	4,5-7,0 bar
Air consumption	19 l/min
Magazine capacity	105

APPLICATIONS

Mouldings, furniture decoration, trim, beading, cabinets and drawers, rattan furniture, finishing

FEATURES


- Compact design- use in tight spaces
- Superior balance with minimal recoil
- One handed magazine opening
- Short trigger stroke

DESCRIPTION

SBN10XP mini AX brad nailer

ART. NR.

8K2001N



TECHNICAL INFORMATION

Length	241 mm
Width	50 mm
Height	210 mm
Weight	1,0 kg
Actuation	TF
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	54 l/min
Magazine capacity	110

APPLICATIONS

Window beading, secret nailing

FEATURES



- Oil free
- Lightest on the market in its class
- Easy to maintain
- Adjustable depth of drive
- EZ-Clear Nose

DESCRIPTION

SLP20XP GLN 4mm
SLP20XP GLN 7mm

ART. NR.

WCE0472
WCE0485



TECHNICAL INFORMATION

Length	275 mm
Width	50 mm
Height	225 mm
Weight	1,2 kg
Actuation	Restrictive
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	54 l/min
Magazine capacity	110

APPLICATIONS

Mouldings, furniture decoration, trim, beading, cabinets and drawers, rattan furniture, finishing

FEATURES



- Oil free
- Adjustable depth of drive
- Comfort grip
- Belt hook
- Drives both slight & medium head brads

DESCRIPTION

FinishPro25XP TF

ART. NR.

762002N



STRIPNAILERS / COILNAILERS

FINISH NAILER FINISHPRO42XP



CLIPPED HEAD 50-90MM SN901XP



CLIPPED HEAD 50-100MM SN951XP



TECHNICAL INFORMATION

Length	330 mm
Width	89 mm
Height	292 mm
Weight	2,1 kg
Actuation	BF (TF)
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	110 l/min
Magazine capacity	104


APPLICATIONS

Baseboards, cabinets, frames, door & window frames, skirting boards, exterior trim, furniture manufacture, dado & architrave

FEATURES

- Oil free
- Adjustable depth of drive
- EZ-Clear Nose
- Comfort grip
- Belt hook

DESCRIPTION	ART. NR.
FinishPro42XP BF/TF	4G2003N



TECHNICAL INFORMATION

Length	385 mm
Width	114 mm
Height	296 mm
Weight	3,4 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	147 l/min
Magazine capacity	50-70



APPLICATIONS

Timber frame construction, sub-floors, framing, sheathing, pallets and crates, decking, furniture frame assembly

FEATURES

- Lightweight and well balanced
- Efficient design
- Nose with sawtooth
- Manual depth setting
- Easily fits between studs & joists
- Selectable trigger

DESCRIPTION	ART. NR.
SN901XP BF/TF	4Z2021N



TECHNICAL INFORMATION

Length	440 mm
Width	121 mm
Height	351 mm
Weight	4,0 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	224 l/min
Magazine capacity	50-70




APPLICATIONS

Timber frame construction, sub-floors, framing, sheathing, pallets and crates, decking, furniture frame assembly

FEATURES

- 20% more powerful than standard framers
- Lightweight and well balanced
- Selectable trigger
- Manual depth setting
- Easily fits between studs & joists

DESCRIPTION	ART. NR.
SN951XP BF/TF	5B2001N



FULL ROUND HEAD 50-90MM SN952XP



∠ 20°



TECHNICAL INFORMATION

Length	516 mm
Width	121 mm
Height	345 mm
Weight	3,8 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	147 l/min
Magazine capacity	64

APPLICATIONS

Timber frame construction, sub-floors, framing, sheathing, pallets and crates, decking, furniture frame assembly

FEATURES


- Lightweight and well balanced
- Efficient design-uses less air
- Nose with sawtooth-more grip
- Manual depth setting
- Selectable trigger

DESCRIPTION

SN952XP BF/TF

ART. NR.

5A2001N



SPECIALTY TOOLS

COILNAILER SCN65XP



∠ 16°

COILNAILER ROOFPRO455XP



∠ 16°

CONCRETE NAILER SAP40XP



TECHNICAL INFORMATION

Length	327 mm
Width	137 mm
Height	359 mm
Weight	3,6 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	270 l/min
Magazine capacity	225-275

APPLICATIONS

Timber frame constructions, framing, sheathing, decking, sub-floors, pallets and crates

FEATURES



- Highest power to weight ratio in its class
- Adjustable depth of drive
- High firing rate-high productivity
- EZ-load design saves time

DESCRIPTION

SCN65XP BF/TF

ART. NR.

542001N



TECHNICAL INFORMATION

Length	260 mm
Width	114 mm
Height	267 mm
Weight	2,5 kg
Actuation	BF (TF)
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	185 l/min
Magazine capacity	120

APPLICATIONS

Asphalt shingles, tar paper, waterproof metal drip edges, paneling, cement board

FEATURES


- Manual depth setting
- Adjustable shingle guidance
- Aluminium mainbody & cap
- Steel wearplates reduce shingle abrasion
- Jaws for nail guidance

DESCRIPTION

RoofPro455XP BF/TF

ART. NR.

3D2011N



TECHNICAL INFORMATION

Length	463 mm
Width	114 mm
Height	310 mm
Weight	3,2 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	5,5-8,3 bar
Air consumption	147 l/min
Magazine capacity	42

APPLICATIONS

Nailing into concrete, masonry & steel

FEATURES


- Well balanced, rugged design
- Magnesium body
- Uses up to 15% less air than competitor tools
- Functions with a "low pressure" compressor

DESCRIPTION

SAP40XP BF/TF

ART. NR.

5V9201N





SENCO®

SENCLAMP FASTENER SC1XP



TECHNICAL INFORMATION

Length	322 mm
Width	82 mm
Height	249 mm
Weight	2,8 kg
Actuation	TF
Air inlet	3/8" NPT
Operating pressure	5,5-7,5 bar
Air consumption	108 l/min
Magazine capacity	120

APPLICATIONS

Butt joints, cabinets, door and window frames, picture frames, furniture

FEATURES

- Pulls joints together while the adhesive cures
- Replaces expensive, time consuming solutions such as screws or clamps
- Provide twice the joint strength of ordinary fasteners

DESCRIPTION	ART. NR.
SC1XP TF	222001N



SPECIALTY TOOLS

WEGMATIC SQS55XP



WEGMATIC SNS50XP



PLIER TOOL DFPXP



TECHNICAL INFORMATION

Length	430 mm
Width	340 mm
Height	310 mm
Weight	10,5 kg
Actuation	Semi automatic
Air inlet	3/8" NPT
Operating pressure	5,5-8,3 bar
Air consumption	185 l/min
Magazine capacity	130


APPLICATIONS

Fast and precise technology for framing

FEATURES

- Exact staple distance
- Edge according to DIN 1052
- User friendly
- 2 handles
- For semi-automation applications

DESCRIPTION	ART. NR.
SQS55XP two handles	EJ01900
Wegmatic guide rail 3 meter	MDM0217



TECHNICAL INFORMATION

Length	430 mm
Width	340 mm
Height	310 mm
Weight	10,5 kg
Actuation	Semi automatic
Air inlet	3/8" NPT
Operating pressure	5,5-8,3 bar
Air consumption	185 l/min
Magazine capacity	130


APPLICATIONS

Fast and precise technology for framing/sheathing

FEATURES

- Exact staple distance
- Edge according to DIN 1052
- User friendly
- 2 handles
- For semi-automation applications

DESCRIPTION	ART. NR.
SNS50XP two handles	EJ02000
Wegmatic guide rail 3 meter	MDM0217



TECHNICAL INFORMATION

Length	380 mm
Width	75 mm
Height	327 mm
Weight	2,2 kg
Actuation	TF
Air inlet	1/4" NPT
Operating pressure	4,5-7,0 bar
Air consumption	26 l/min
Magazine capacity	230


APPLICATIONS

Corrugated box fabrication, packaging, displays, light assembly

FEATURES

- High capacity (230 staples) magazine
- Comfort grip
- 175mm throat allows for extended reach into cartons
- Tool-free adjustable anvil opening

DESCRIPTION	ART. NR.
DFPXP TF	8H2001N





SENCO[®]


**PLIER TOOL
F75LXP**

NEW



**PLIER TOOL
F75SXP**

NEW

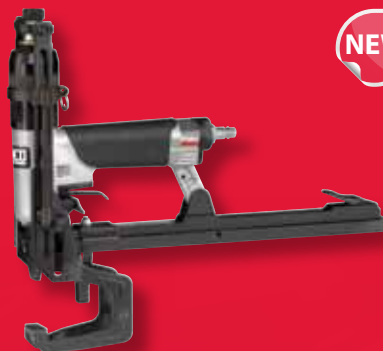

**PLIER TOOL
FAT25**

NEW



TECHNICAL INFORMATION

Length	380 mm
Width	75 mm
Height	327 mm
Weight	2,2 kg
Actuation	TF
Air inlet	1/4" NPT
Operating pressure	4,5-7,0 bar
Air consumption	33 l/min
Magazine capacity	230

APPLICATIONS

Corrugated box fabrication, bed manufacturing, packaging

FEATURES


- High capacity (152 staples) magazine
- Comfort grip
- 175mm throat allows for extended reach into cartons
- Tool-free adjustable anvil opening

DESCRIPTION

F75LXP TF

ART. NR.

8J2002N



TECHNICAL INFORMATION

Length	380 mm
Width	75 mm
Height	327 mm
Weight	2,2 kg
Actuation	TF
Air inlet	1/4" NPT
Operating pressure	4,5-7,0 bar
Air consumption	33 l/min
Magazine capacity	230

APPLICATIONS

Corrugated box fabrication, bed manufacturing, packaging

FEATURES


- High capacity (152 staples) magazine
- Comfort grip
- Tool-free adjustable anvil opening

DESCRIPTION

F75SXP TF

ART. NR.

8J2001N



TECHNICAL INFORMATION

Length	380 mm
Width	75 mm
Height	320 mm
Weight	2,1 kg
Actuation	TF
Air inlet	1/4" NPT
Operating pressure	4,5-7,0 bar
Air consumption	33 l/min
Magazine capacity	170

APPLICATIONS

Mattress plastic and cloth stapling, Upholstered, Furniture, Plastic tanks (paint bins etc.), Cardboard packaging

FEATURES


- The jaw opening is adjustable by simply turning the screw on the top of the tool
- Comfort grip
- Rear exhaust
- Bottom load double length magazine
- Jaw openings are both wide and deep

DESCRIPTION

FAT25 TF

ART. NR.

FAT25



Designed without compromise for professional use at a lower volume. The tools in the Pro Series reflect Senco's 50 year reputation in reliability and performance.



SENCO[®]

PRO SERIES

Professional tools
designed for lower volume
professional end users



1 YEAR
LIMITED
WARRANTY

PRO
SERIES

USE SENCO TOOLS

STAPLERS

LIGHT WIRE STAPLER SFW09



TECHNICAL INFORMATION

Length	241 mm
Width	49 mm
Height	151 mm
Weight	0,9 kg
Actuation	TF/Automatic
Air inlet	1/4" NPT
Operating pressure	4,1-6,5 bar
Air consumption	23 l/min
Magazine capacity	110-185

APPLICATIONS

Upholstering operations, furniture assembly, cabinets, automotive vinyl roofs and interior trim, bedding manufacture, picture frames, shoemaking, molding, roofing felt

FEATURES

- Long 25mm lip
- Rounded steel cap
- Rear exhaust
- Rear magazine bumper
- Comfort grip

DESCRIPTION

DESCRIPTION	ART. NR.
SFW09 AT	4C2021N
SFW09 AT Automatic	4C2051N
SFW09 A	4C2031N
SFW09 B	4C2012N
SFW09 B Automatic	4C2061N
SFW09 C	4C2001N
SFW09 C Automatic	4C2071N
SFW09 F	4C2041N
SFW09 AT leer grip aanpassing	4C2021N-1
SFW09 A leer grip aanpassing	4C2031N-1



MEDIUM WIRE STAPLER SLS18MG



TECHNICAL INFORMATION

Length	260 mm
Width	64 mm
Height	241 mm
Weight	1,2 kg
Actuation	BF (TF)
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	68 l/min
Magazine capacity	110

APPLICATIONS



Cabinets, furniture, drawer assembly, case backs, picture frames

FEATURES

- Magnesium body
- Oil free
- Adjustable depth of drive
- Selectable trigger
- Comfort grip

DESCRIPTION

DESCRIPTION	ART. NR.
SLS18-L Mg BF/TF	1W2025N
SLS18-M Mg BF/TF	IW2026N
SLS18-92 Mg BF/TF	IW2027N





SENCO[®]

**HEAVY WIRE STAPLER
SNS41**



**WIDE CROWN STAPLER
WC330-SP**



**WIDE CROWN STAPLER
WC360-SP**



TECHNICAL INFORMATION

Length	381 mm
Width	75 mm
Height	273 mm
Weight	2,1 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	5,5-8,3 bar
Air consumption	153 l/min
Magazine capacity	160


APPLICATIONS

Framework, sub-floors, sheathing, furniture framing, pallets, ramps and gates, crates, fascia & soffits

FEATURES

- Durable design
- Adjustable depth of drive
- 360° adjustable exhaust
- EZ-Clear Nose
- Comfort grip
- Reload indicator

DESCRIPTION	ART. NR.
SNS41 BF/TF	3L2003N
SNS41 TF	3L2004N



TECHNICAL INFORMATION

Length	397 mm
Width	133 mm
Height	400 mm
Weight	5,9 kg
Actuation	TF
Air inlet	3/8" NPT
Operating pressure	5,5-8,3 bar
Air consumption	176 l/min
Magazine capacity	120


APPLICATIONS

Mouldings, furniture decoration, glass slats, cabinets and drawer cabinets, rattan furniture, finishing

FEATURES

- Ergonomic design
- Adjustable depth of drive
- Available with extra handle for higher user convenience

DESCRIPTION	ART. NR.
WC330-SP TF	6P2001N



TECHNICAL INFORMATION

Length	400 mm
Width	138 mm
Height	470 mm
Weight	6,3 kg
Actuation	TF
Air inlet	3/8" NPT
Operating pressure	5,5-8,3 bar
Air consumption	261 l/min
Magazine capacity	120


APPLICATIONS

Mouldings, furniture decoration, glass slats, cabinets and drawer cabinets, rattan furniture, finishing

FEATURES

- Ergonomic design
- Adjustable depth of drive
- Available with extra handle for higher user convenience

DESCRIPTION	ART. NR.
WC360-SP TF	7E2001N



STRIPNAILERS

MICROPINNER 0,6MM FINISHPRO10



BRAD NAILER 1,2MM FINISHPRO18MG



BRAD NAILER 1,6MM FINISHPRO32



TECHNICAL INFORMATION

Length	225 mm
Width	41 mm
Height	171 mm
Weight	1,1 kg
Actuation	TF
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	22 l/min
Magazine capacity	110


APPLICATIONS

Mouldings, glazing beads, furniture decoration, cabinets and drawers, rattan furniture

FEATURES

- Rear exhaust
- Adjustable depth of drive
- Reload indicator
- Extra powerful
- Magazine bumper pad

DESCRIPTION	ART. NR.
FinishPro10 TF	2C2001N



TECHNICAL INFORMATION

Length	267 mm
Width	64 mm
Height	248 mm
Weight	1,1 kg
Actuation	BF (TF)
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	68 l/min
Magazine capacity	110


APPLICATIONS

Mouldings, furniture decoration, trim, beading, cabinets and drawers, rattan furniture, finishing

FEATURES

- Magnesium body
- Oil free
- Adjustable depth of drive
- Selectable trigger
- Comfort grip

DESCRIPTION	ART. NR.
FinishPro18Mg BF/TF	1U2025N



TECHNICAL INFORMATION

Length	307 mm
Width	76 mm
Height	267 mm
Weight	1,9 kg
Actuation	BF (TF)
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	62 l/min
Magazine capacity	110


APPLICATIONS

Baseboards, frames, skirting boards, trim, architrave, dado, moldings

FEATURES

- Adjustable depth of drive
- EZ-Clear Nose
- 360° adjustable exhaust
- Comfort grip

DESCRIPTION	ART. NR.
FinishPro32 TF + Case	1X2201N
FinishPro32 BF/TF	1X2202N





SENCO®

FINISH NAILER FINISHPRO35MG



∠ 34°



FINISH NAILER SFN30



∠ 34°



TECHNICAL INFORMATION

Length	330 mm
Width	86 mm
Height	311 mm
Weight	2,1 kg
Actuation	BF (TF)
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	128 l/min
Magazine capacity	104


APPLICATIONS

Baseboards, cabinets, frames, door & window frames, skirting boards, exterior trim, furniture manufacture, dado & architrave

FEATURES

- Adjustable depth of drive
- EZ-Clear Nose
- 360° adjustable exhaust
- Comfort grip

DESCRIPTION	ART. NR.
FinishPro35Mg BF/TF	6G2001N



TECHNICAL INFORMATION

Length	305 mm
Width	83 mm
Height	244 mm
Weight	1,6 kg
Actuation	BF (TF)
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	61 l/min
Magazine capacity	104


APPLICATIONS

Baseboards, cabinets, frames, door & window frames, skirting boards, exterior trim, furniture manufacture, dado & architrave

FEATURES

- Oil-free
- Lightweight
- Adjustable depth of drive
- No-Mar pad

DESCRIPTION	ART. NR.
SFN30 BF/TF	622002N
SFN30 TF	622003N



STRIPNAILERS

CLIPPED HEAD NAILER SIDINGPRO40



∠ 34°



CLIPPED HEAD NAILER FRAMEPRO601



∠ 34°



CLIPPED HEAD NAILER FRAMEPRO651



∠ 34°



TECHNICAL INFORMATION

Length	351 mm
Width	86 mm
Height	322 mm
Weight	2,1 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	173 l/min
Magazine capacity	70

APPLICATIONS



Siding, sub-floors, pallets and crates

FEATURES

- Lightweight
- EZ-Clear Nose
- Adjustable depth of drive
- Powerful

DESCRIPTION

DESCRIPTION	ART. NR.
SidingPro40 BF/TF	2Y2001N
SidingPro40 TF	2Y2002N



TECHNICAL INFORMATION

Length	384 mm
Width	106 mm
Height	343 mm
Weight	3,6 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	283 l/min
Magazine capacity	70

APPLICATIONS




Timber frame constructions, framing, sub-floors, pallets and crates, decking, roofs, fencing, door and window frames

FEATURES

- Lightweight and powerful
- Toolless depth of drive
- 360° adjustable exhaust
- Nose with sawtooth for more grip
- Shorter straight-line magazine
- Adjustable trigger

DESCRIPTION

DESCRIPTION	ART. NR.
FramePro601 BF/TF	1G2101N



TECHNICAL INFORMATION

Length	384 mm
Width	106 mm
Height	363 mm
Weight	3,8 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	312 l/min
Magazine capacity	65-70

APPLICATIONS




Timber frame constructions, framing, sub-floors, pallets and crates, decking, roofs, fencing, door and window frames

FEATURES

- Extra powerful
- Adjustable depth of drive
- 360° adjustable exhaust
- Nose with sawtooth for more grip
- Shorter straight-line magazine
- Comfort grip

DESCRIPTION

DESCRIPTION	ART. NR.
FramePro651 BF/TF	2G2111N
FramePro651 100mm BF/TF	2G2121N



FULL ROUND HEAD NAILER FRAMEPRO602



∠ 20°



FULL ROUND HEAD NAILER FRAMEPRO652



∠ 20°



TECHNICAL INFORMATION

Length	508 mm
Width	106 mm
Height	337 mm
Weight	3,9 kg
Actuation	TF
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	283 l/min
Magazine capacity	60


APPLICATIONS

Timber frame constructions, framing, sub-floors, pallets and crates, decking, roofs, fencing, door and window frames

FEATURES

- Lightweight and powerful
- Adjustable depth of drive
- 360° adjustable exhaust
- Nose with sawtooth for more grip
- Comfort grip

DESCRIPTION	ART. NR.
FramePro602 BF/TF	1E2001N
FramePro602 TF	1E2002N
FramePro602 BF/TF 17°	1E2101N



TECHNICAL INFORMATION

Length	511 mm
Width	106 mm
Height	343 mm
Weight	3,9 kg
Actuation	TF
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	283 l/min
Magazine capacity	60


APPLICATIONS

Timber frame constructions, framing, sub-floors, pallets and crates, decking, roofs, fencing, door and window frames

FEATURES

- Lightweight and powerful
- Adjustable depth of drive
- 360° adjustable exhaust
- Nose with sawtooth for more grip
- Comfort grip

DESCRIPTION	ART. NR.
FramePro652 BF/TF	2E2001N
FramePro652 100mm TF	2E2012N



STRIPNAILERS / COILNAILERS

FULL ROUND HEAD NAILER SN1302



∠ 20°

FULL ROUND HEAD NAILER SN1602



∠ 20°

COILNAILER SCN30



∠ 0°



TECHNICAL INFORMATION

Length	533 mm
Width	144 mm
Height	478 mm
Weight	6,2 kg
Actuation	TF
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	255 l/min
Magazine capacity	50-56


APPLICATIONS

Prefab, roofs, timber frame construction, sub-floors

FEATURES

- Robust design for intensive use
- Available with extra handle for higher user convenience
- Adjustable depth of drive
- Reload indicator

DESCRIPTION	ART. NR.
SN1302 20° TF	6L2001N
SN1302 24° TF	6L2001NX



TECHNICAL INFORMATION

Length	550 mm
Width	150 mm
Height	495 mm
Weight	7,0 kg
Actuation	TF
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	297 l/min
Magazine capacity	48-56


APPLICATIONS

Prefab, roofs, timber frame construction, sub-floors

FEATURES

- Compact size comparing with other 160mm nailers
- Dry-fire lockout
- Cushioned grip provides greater comfort and less fatigue

DESCRIPTION	ART. NR.
SN1602 20° TF	7D2001N



TECHNICAL INFORMATION

Length	277 mm
Width	98 mm
Height	203 mm
Weight	1,1 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	43 l/min
Magazine capacity	150-188
Pitch	6 mm



APPLICATIONS

Furniture, floors, fences, garden products

FEATURES

- Special nose for short nails
- Lightweight and compact design
- Selectable trigger
- For plastic collated coils

DESCRIPTION	ART. NR.
SCN30 BF/TF	SCN30





SENCO®

COILNAILER SCN34



∠ 15-16°



COILNAILER COILPRO50



∠ 15-16°

COILNAILER SCN49



∠ 16°



TECHNICAL INFORMATION

Length	260 mm
Width	108 mm
Height	302 mm
Weight	1,6 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	44 l/min
Magazine capacity	400
Pitch	6 mm

APPLICATIONS

Furniture, floors, fences, garden products, pallets and crates

FEATURES



- Selectable trigger
- Lightweight and compact design
- Adjustable depth of drive

DESCRIPTION

SCN34 BF/TF

ART. NR.

SCN34



TECHNICAL INFORMATION

Length	305 mm
Width	128 mm
Height	285 mm
Weight	2,0 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	83 l/min
Magazine capacity	250-375
Pitch	6-7,5 mm

APPLICATIONS

Pallets and crates, gate and fence construction, underlay, garden products, cladding

FEATURES



- Well balanced and lightweight
- Selectable trigger
- Adjustable depth of drive
- Highest power/weight ratio in its class

DESCRIPTION

CoilPro50 BF/TF

ART. NR.

4U2001N



TECHNICAL INFORMATION

Length	314 mm
Width	132 mm
Height	304 mm
Weight	2,3 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	111 l/min
Magazine capacity	250-375

APPLICATIONS

Pallets and crates, gate and fence construction, underlay, garden products, cladding

FEATURES



- Well balanced and lightweight
- Selectable trigger
- Adjustable depth of drive
- Drives wire and plastic collated nails

DESCRIPTION

SCN49 BF/TF

ART. NR.

SCN49



COILNAILERS

COILNAILER SCN58A



∠15-16°



COILNAILER SCN650



∠ 0°

COILNAILER SCN75



∠15-16°



TECHNICAL INFORMATION

Length	300 mm
Width	89 mm
Height	310 mm
Weight	2,6 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	113 l/min
Magazine capacity	200-300

APPLICATIONS

Construction, pallets and crates, fencing, packaging

FEATURES




- Well balanced and lightweight
- Powerful
- Adjustable depth of drive
- Robust design

DESCRIPTION

SCN58A BF/TF

ART. NR.

2S9011N



TECHNICAL INFORMATION

Length	316 mm
Width	145 mm
Height	300 mm
Weight	2,3 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	106 l/min
Magazine capacity	300

APPLICATIONS

Wall sheathing/Siding, packaging (boxes, crates), fencing, sub-flooring, boarding and other wooden assembly work

FEATURES




- Ergonomically magnesium housing
- Excellent power to weight ratio
- User friendly depth of drive adjustment
- High capacity easy to load magazine

DESCRIPTION

SCN650 BF/TF

ART. NR.

7P2001N



TECHNICAL INFORMATION

Length	292 mm
Width	132 mm
Height	315 mm
Weight	2,9 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	168 l/min
Magazine capacity	150-250

APPLICATIONS

Framing, sheathing/ Siding, decking, sub-flooring, exterior decks, pallets and crates

FEATURES




- Nose with sawtooth for more grip
- Depth of drive
- Adjustable trigger
- Runs both wire welded and plastic collated nails without any adjustment

DESCRIPTION

SCN75 BF/TF

ART. NR.

SCN75





COILNAILER SCN90



∠ 15-16°



TECHNICAL INFORMATION

Length	306 mm
Width	128 mm
Height	317 mm
Weight	3,3 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	157 l/min
Magazine capacity	150-300

APPLICATIONS

Timber frame constructions, sub-floors, pallets and crates, decking, roofs, cladding

FEATURES




- Well balanced and lightweight
- Nose with sawtooth for more grip
- Selectable trigger
- Adjustable depth of drive

DESCRIPTION

SCN90 BF/TF

ART. NR.

SCN90



SPECIALTY TOOLS

METAL CONNECTOR MC60-34



∠ 34°

METAL CONNECTOR ANCHORPRO60



∠ 34°

CORRUGATED FASTENER SC15



TECHNICAL INFORMATION

Length	350 mm
Width	110 mm
Height	359 mm
Weight	2,7 kg
Actuation	TF
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	118 l/min
Magazine capacity	20

APPLICATIONS

Shaft pre-drilled (metal) plates, shaft pre-drilled metal strips, bar carriers, anchor plates, corner anchors

FEATURES


- Magnesium body
- Adjustable depth of drive
- Special nose for good visibility and more precision
- Reload indicator

DESCRIPTION

MC60-34 TF

ART. NR.

6K2001N



TECHNICAL INFORMATION

Length	305 mm
Width	94 mm
Height	318 mm
Weight	1,9 kg
Actuation	TF
Air inlet	1/4" NPT
Operating pressure	3,5 - 8,0 bar
Air consumption	167 l/min
Magazine capacity	20

APPLICATIONS

Fix pre-drilled metal plates, fix metal plates, bar carriers, anchor plates, corner anchors

FEATURES


- Small and lightweight for maximum maneuverability
- Toolless depth of drive
- Dry fire lockout with extra safety design
- Fast loading system

DESCRIPTION

Senco AnchorPro60 40&60mm

ART. NR.

8B2001N



TECHNICAL INFORMATION

Length	300 mm
Width	82 mm
Height	282 mm
Weight	2,4 kg
Actuation	BF (TF)
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	99 l/min
Magazine capacity	73

APPLICATIONS

Timber frame constructions, sub-floors, pallets and crates, decking, roofs, cladding

FEATURES


- Magnesium body
- Adjustable depth of drive
- Selectable trigger
- Sharp angled nosepiece to fit into corners

DESCRIPTION

SC15 BF/TF

ART. NR.

6N2001N





SENCO®

CORRUGATED FASTENER SC25



T-NAILER STN64



BUTTON CAP STAPLER BC58



TECHNICAL INFORMATION

Length	350 mm
Width	112 mm
Height	370 mm
Weight	3,9 kg
Actuation	TF
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	99 l/min
Magazine capacity	80

APPLICATIONS

Timber frame constructions, sub-floors, pallets and crates, decking, roofs, cladding

FEATURES

- Robust design for industrial usage
- Well balanced
- Easy to load

DESCRIPTION

SC25 TF

ART. NR.

E612000



TECHNICAL INFORMATION

Length	305 mm
Width	82 mm
Height	305 mm
Weight	2,4 kg
Actuation	BF (TF)
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	85 l/min
Magazine capacity	80

APPLICATIONS

Floors, underlayment, wood construction

FEATURES


- Lightweight and powerful
- Specially hardened driver
- 360° adjustable exhaust
- Drives into concrete, steel & wood

DESCRIPTION

STN64 BF/TF

ART. NR.

1SA2001N



TECHNICAL INFORMATION

Length	211 mm
Width	52 mm
Height	197 mm
Weight	1,2 kg
Actuation	TF
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	23 l/min
Magazine capacity	100

APPLICATIONS

House wrap installation, roofing felt, packaging

FEATURES


- Easy load system for staples and caps
- Light weight aluminium housing
- Comfort grip
- Balanced and fast for high production

DESCRIPTION

Senco BC58

ART. NR.

4A0001N



SPECIALTY TOOLS

PALM HAND NAILER A20



HAMMERTACKER SHT-F



MANUAL CARTON CLOSER SCCM



TECHNICAL INFORMATION

Length	101 mm
Width	83 mm
Height	122 mm
Weight	1,1 kg
Air inlet	3/8" NPT
Operating pressure	3,5-8,3 bar
Air consumption	57-113 l/min

APPLICATIONS

Nailing in places with limited motion space and fixing anchor plates and corner anchors

FEATURES


- Drives loose nails 50-90mm
- Magnetic nail guide
- Soft rubber grip

DESCRIPTION

A20 Palm nailer

ART. NR.

PC0781



TECHNICAL INFORMATION

Length	300 mm
Width	30 mm
Height	85 mm
Weight	1,1 kg
Magazine capacity	168

APPLICATIONS

Upholstery, installing insulation, carpet and underlayment, plastic

FEATURES

- Durable construction
- Comfortable anti-slip
- Quick loading

DESCRIPTION

SHT-F Hammertacker

ART. NR.

6R2001N



TECHNICAL INFORMATION

Length	455 mm
Width	104 mm
Height	320 mm
Weight	1,7 kg
Magazine capacity	120

APPLICATIONS

Packaging, carton closing

FEATURES

- Toolless depth of drive
- Staple clinch adjustment
- Hard-wearing steel magazine
- High capacity and quick load magazine
- Durable and lightweight

DESCRIPTION

SCCM18P-35 for 1 staple

ART. NR.

7M2001N

SCCM22P-35 for 1 staple

7M2002N

SCCM18P-32 for U staple

7M2003N

SCCM22P-32 for U staple

7M2004N





SENCO[®]

**CARTON CLOSER
SCCP**



**CARTON CLOSER
SRCC**



NEW



TECHNICAL INFORMATION

Length	406 mm
Width	103 mm
Height	210 mm
Weight	1,9 kg
Operating pressure	4,8-6,3 bar
Air consumption	58 l/min
Magazine capacity	120

APPLICATIONS

Packaging, carton closing

FEATURES

- Toolless depth of drive
- Staple clinch adjustment
- Hard-wearing steel magazine
- High capacity and quick load magazine
- Durable and lightweight

DESCRIPTION

DESCRIPTION	ART. NR.
SCCP18P-35 for 1 staple	7M2011N
SCCP22P-35 for 1 staple	7M2012N
SCCP18P-32 for U staple	7M2013N
SCCP22P-32 for U staple	7M2014N



TECHNICAL INFORMATION

Length	235 mm
Width	104 mm
Height	205 mm
Weight	1,8 kg
Air inlet	1/4" NPT
Operating pressure	4,9-6,3 bar
Air consumption	59 l/min
Magazine capacity	1.000

APPLICATIONS


Packaging, carton closing

FEATURES

- Toolless depth of drive
- Staple clinch adjustment
- Hard-wearing steel magazine
- High capacity and quick load magazine
- Durable and lightweight

DESCRIPTION

DESCRIPTION	ART. NR.
SRCC18P-32 for U staple	7M2015N



DRILLS AND SCREWDRIVERS

PNEUMATIC DRILL SEN510C



PNEUMATIC DRILL SEN511C



TECHNICAL INFORMATION

Length	215 mm
Width	42 mm
Height	137 mm
Weight	1,3 kg
Torque	12,5 Nm
RPM	800
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	226 l/min

APPLICATIONS

Drilling

FEATURES

- Composite housing
- Comfort grip
- Low noise - 83 dB(A)
- Direct drive
- Reversible motor
- Low maintenance cost

DESCRIPTION

SEN510C Drill

ART. NR.

SEN510C



TECHNICAL INFORMATION

Length	188 mm
Width	42 mm
Height	137 mm
Weight	1,1 kg
Torque	5,4 Nm
RPM	1800
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	212 l/min

APPLICATIONS

Drilling

FEATURES

- Composite housing
- Comfort grip
- Low noise - 83 dB(A)
- Direct drive
- Reversible motor
- Low maintenance cost

DESCRIPTION

SEN511C Drill

ART. NR.

SEN511C





SENCO®



PNEUMATIC SCREWDRIVER SEN600C



TECHNICAL INFORMATION

Length	187 mm
Width	42 mm
Height	137 mm
Weight	0,9 kg
Torque	5,3 Nm
RPM	1800
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	424 l/min
Torque control	Direct
Start	Direct

APPLICATIONS

For screwdriving where torque is not critical

FEATURES

- Composite housing
- Low noise - 83 dB(A)
- Direct torque control
- Push-in start
- Low maintenance cost

DESCRIPTION	ART. NR.
SEN600C Screwdriver	SEN600C

PNEUMATIC SCREWDRIVER SEN602C



TECHNICAL INFORMATION

Length	205 mm
Width	42 mm
Height	137 mm
Weight	1,1 kg
Torque	10,1 Nm
RPM	800
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	453 l/min
Torque control	Direct
Start	Direct

APPLICATIONS

For screwdriving where torque is not critical

FEATURES

- Composite housing
- Low noise - 83 dB(A)
- Direct torque control
- Reversible motor
- Low maintenance cost

DESCRIPTION	ART. NR.
SEN602C Screwdriver	SEN602C

SCREWDRIVERS

PNEUMATIC SCREWDRIVER SEN610C



PNEUMATIC SCREWDRIVER SEN611C



PNEUMATIC SCREWDRIVER SEN612C



TECHNICAL INFORMATION

Length	210 mm
Width	42 mm
Height	137 mm
Weight	1,1 kg
Torque	1,2-6,5 Nm
RPM	1800
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	424 l/min
Torque control	Adjustable
Start	Push-in

APPLICATIONS

Screwdriving with adjustable torque

FEATURES

- Composite housing
- Low noise - 83 dB(A)
- Adjustable torque
- Push-in start
- Low maintenance cost

DESCRIPTION

SEN610C Screwdriver

ART. NR.

SEN610C



TECHNICAL INFORMATION

Length	230 mm
Width	42 mm
Height	137 mm
Weight	1,2 kg
Torque	1,2-15 Nm
RPM	800
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	453 l/min
Torque control	Adjustable
Start	Push-in

APPLICATIONS

Screwdriving with adjustable torque

FEATURES

- Composite housing
- Low noise - 83 dB(A)
- Adjustable torque
- Push-in start
- Low maintenance cost

DESCRIPTION

SEN611C Screwdriver

ART. NR.

SEN611C



TECHNICAL INFORMATION

Length	202 mm
Width	43 mm
Height	137 mm
Weight	1,2 kg
Torque	0-12,5 Nm
RPM	800
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	453 l/min
Torque control	Adjustable
Start	Push-in

APPLICATIONS

For screwdriving where torque is not critical

FEATURES

- Composite housing
- Low noise - 83 dB(A)
- Reversible motor
- Low maintenance cost

DESCRIPTION

SEN612C Screwdriver

ART. NR.

SEN612C

PNEUMATIC IMPACT DRIVER SEN700C



NEW



TECHNICAL INFORMATION

Length	164 mm
Width	48 mm
Height	168 mm
Weight	0,98 kg
Torque	325 Nm
RPM	8900
Air inlet	1/4" NPT
Operating pressure	6,2 bar
Air consumption	96 l/min
Torque control	Adjustable
Start	Push-in

APPLICATIONS

Screwdriving application that need high torque

FEATURES

- Composite housing
- Twin-hammer mechanism provides more power
- Feather trigger for precise speed control
- Left and right turning
- Energy efficient motor

DESCRIPTION

SEN700C

ART. NR.

SEN700C



The tools in the PalletPro Series are perfectly balanced and very powerful, which enables long-term use. Features of the PalletPro Series are: rapid fire with a superb reliability, with low maintenance.



SENCO[®]



PALLETPRO SERIES

Specially designed for
longterm usage in the pallet
and packaging industry

1
YEAR
LIMITED
WARRANTY

PALLET
PRO
SERIES

USE SENCOTOLS

COILNAILERS

COILNAILER PAL50



∠ 16°

COILNAILER PAL57F



∠ 16°

COILNAILER PAL70



∠ 16°



TECHNICAL INFORMATION

Length	305 mm
Width	128 mm
Height	285 mm
Weight	2,0 kg
Actuation	BF (TF)
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	102 l/min
Magazine capacity	350-400
Pitch	6-7 mm

APPLICATIONS

Furniture, floors, fences, garden products, pallets and crates

FEATURES



- Robust design for intensive use in the pallet industry
- Well balanced and powerful
- Strong and easy to load magazine

DESCRIPTION

PAL50 BF/TF

ART. NR.

PAL50



TECHNICAL INFORMATION

Length	302 mm
Width	133 mm
Height	286 mm
Weight	2,7 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	87 l/min
Magazine capacity	300-350
Pitch	6,8-8,4 mm

APPLICATIONS

Pallets and crates, floors, roofs, garden products, cladding

FEATURES



- Robust design for intensive use in the pallet industry
- Side steel wearplates reduce tool abrasion
- Strong and easy to load magazine
- Well balanced and powerful

DESCRIPTION

PAL57F BF/TF

ART. NR.

PAL57F



TECHNICAL INFORMATION

Length	339 mm
Width	129 mm
Height	319 mm
Weight	3,6 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	136 l/min
Magazine capacity	250-300
Pitch	8 mm

APPLICATIONS

Pallets and crates, timber, sub-floors, shuttering, roof, battens, cladding

FEATURES



- Robust design for intensive use in the pallet industry
- Well balanced and powerful
- Strong and easy to load magazine
- High durability driver and piston

DESCRIPTION

PAL70 BF/TF

ART. NR.

PAL70





SENCO®

COILNAILER PAL70 DUPLEX



∠ 16°



TECHNICAL INFORMATION

Length	339 mm
Width	129 mm
Height	319 mm
Weight	3,6 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	136 l/min
Magazine capacity	250-300
Pitch	8 mm

APPLICATIONS

Pallets and crates

FEATURES


- Robust design for intensive use in the pallet industry
- Well balanced and powerful
- Strong and easy to load magazine
- High durability driver and piston

DESCRIPTION

PAL70 Duplex BF/TF

ART. NR.

XL3035



COILNAILERS



COILNAILER PAL83



∠ 16°

COILNAILER PAL90



∠ 16°



TECHNICAL INFORMATION

Length	341 mm
Width	132 mm
Height	365 mm
Weight	3,8 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	164 l/min
Magazine capacity	225-300
Pitch	8 mm

APPLICATIONS

Pallets and crates, timber, sub-floors shuttering, roof, battens, cladding

FEATURES

- Robust design for intensive use in the pallet industry
- Well balanced and powerful
- Strong and easy to load magazine

DESCRIPTION

PAL83 BF/TF

ART. NR.

PAL83



TECHNICAL INFORMATION

Length	385 mm
Width	145 mm
Height	370 mm
Weight	3,5 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	193 l/min
Magazine capacity	200-300
Pitch	8 mm

APPLICATIONS

Pallets and crates, timber, sub-floors shuttering, roof, battens, cladding

FEATURES


- Robust design for intensive use in the pallet industry
- Side steel wearplates reduce tool abrasion
- Strong and easy to load magazine
- Well balanced and powerful

DESCRIPTION

PAL90 BF/TF

ART. NR.

PAL90



COILNAILER PAL100



∠ 16°

COILNAILER PAL130



∠ 16°



TECHNICAL INFORMATION

Length	338 mm
Width	153 mm
Height	417 mm
Weight	5,2 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	322 l/min
Magazine capacity	225-300
Pitch	8 mm

APPLICATIONS


Pallets and crates, timber, sub-floors shuttering, roof, battens, cladding

FEATURES

- Robust design for intensive use in the pallet industry
- Aluminium body
- Strong and easy to load magazine
- Includes removable handle

DESCRIPTION

DESCRIPTION	ART. NR.
PAL100 BF/TF	PAL100
PAL100EPAL BF/TF	PAL100EPAL



TECHNICAL INFORMATION

Length	330 mm
Width	168 mm
Height	457 mm
Weight	5,9 kg
Actuation	BF (TF)
Air inlet	3/8" NPT
Operating pressure	4,8-8,3 bar
Air consumption	323 l/min
Magazine capacity	120-225
Pitch	11 mm

APPLICATIONS


Pallets and crates, timber, sub-floors shuttering, roof, battens, cladding

FEATURES

- Robust design for intensive use in the pallet industry
- For use in the toughest environments
- Includes removable handle
- Strong and easy to load magazine

DESCRIPTION

DESCRIPTION	ART. NR.
PAL130 BF/TF	5M2001N



The SemiPro Series is specifically designed for professional use in home and garden applications, where tools are not used with a high frequency.



SENCO[®]



**SEMIPRO
SERIES**

Senco quality for the low
volume user

1 YEAR
LIMITED
WARRANTY

SEMI
PRO
SERIES

USE Senco TOOLS

STAPLERS / STRIPNAILERS

LIGHT WIRE STAPLER SFW05



MEDIUM WIRE STAPLER S150LS



BRAD NAILER S200BN



TECHNICAL INFORMATION

Length	229 mm
Width	45 mm
Height	163 mm
Weight	0,9 kg
Actuation	TF
Air inlet	1/4" NPT
Operating pressure	5,2-6,9 bar
Air consumption	27 l/min
Magazine capacity	100

APPLICATIONS


Upholstering operations, furniture assembly, cabinets, automotive vinyl roofs and interior trim, bedding manufacture, TV and stereo grille cloth, picture frames, shoemaking, molding and roofing felt

FEATURES

- Slim, compact design for use in small spaces
- Adjustable exhaust
- Lightweight

DESCRIPTION

DESCRIPTION	ART. NR.
SFW05-B	SFW05-B
SFW05-C	SFW05-C
SFW05-AT	SFW05-AT



TECHNICAL INFORMATION

Length	249 mm
Width	45 mm
Height	227 mm
Weight	1,5 kg
Actuation	TF
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	54 l/min
Magazine capacity	100-110

APPLICATIONS

Cabinets, furniture, drawer assembly, case backs, picture frames

FEATURES

- Adjustable depth of drive
- Comfort grip
- Reload indicator

DESCRIPTION

DESCRIPTION	ART. NR.
S150LS TF	952008N



TECHNICAL INFORMATION

Length	251 mm
Width	68 mm
Height	232 mm
Weight	1,4 kg
Actuation	TF
Air inlet	1/4" NPT
Operating pressure	5,0-8,3 bar
Air consumption	22 l/min
Magazine capacity	107-110

APPLICATIONS


Mouldings, trim, furniture decoration, glazing beads, cupboards and drawers, general finishing

FEATURES

- Adjustable depth of drive
- EZ-Clear Nose
- Comfort grip
- Adjustable exhaust
- Reload indicator

DESCRIPTION

DESCRIPTION	ART. NR.
S200BN TF	922008N





SENCO[®]

**BRAD NAILER
S200SM**



**BRAD NAILER
S250SM**



**BRAD NAILER
S250FN**



∠ 34°



TECHNICAL INFORMATION

Length	254 mm
Width	68 mm
Height	230 mm
Weight	1,4 kg
Actuation	TF
Air inlet	1/4" NPT
Operating pressure	5,0-8,3 bar
Air consumption	113 l/min
Magazine capacity	100


APPLICATIONS

Mouldings, trim, furniture decoration, glazing beads, cupboards and drawers, general finishing

FEATURES

- Adjustable depth of drive
- Reload indicator
- EZ-Clear Nose
- Comfort grip
- Adjustable exhaust

DESCRIPTION	ART. NR.
S200SM TF	942008N



TECHNICAL INFORMATION

Length	285 mm
Width	73 mm
Height	290 mm
Weight	2,0 kg
Actuation	TF
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	95 l/min
Magazine capacity	100


APPLICATIONS

Mouldings, trim, furniture decoration, glazing beads, cupboards and drawers, general finishing

FEATURES

- Adjustable depth of drive
- Reload indicator
- EZ-Clear Nose
- Comfort grip
- Adjustable exhaust

DESCRIPTION	ART. NR.
S250SM TF	962008N



TECHNICAL INFORMATION

Length	303 mm
Width	85 mm
Height	346 mm
Weight	2,3 kg
Actuation	TF
Air inlet	1/4" NPT
Operating pressure	5,0-7,0 bar
Air consumption	128 l/min
Magazine capacity	100


APPLICATIONS

Baseboards, cabinets, frames, door & window frames, skirting boards, exterior trim, furniture manufacture, dado & architrave

FEATURES

- Adjustable depth of drive
- EZ-Clear Nose
- Comfort grip
- Adjustable exhaust

DESCRIPTION	ART. NR.
S250FN TF	932008N



STRIPNAILERS

CH FRAMING NAILER A900FN



∠ 34°



COILNAILER S65CNP



∠ 16°



TECHNICAL INFORMATION

Length	530 mm
Width	90 mm
Height	290 mm
Weight	3,8 kg
Actuation	TF
Air inlet	1/4" NPT
Operating pressure	4,8-8,3 bar
Air consumption	274 l/min
Magazine capacity	100

APPLICATIONS



Baseboards, cabinets, frames, door & window frames, skirting boards, exterior trim, furniture manufacture, dado & architrave

FEATURES

- Adjustable depth of drive
- EZ-Clear Nose
- Comfort grip
- Adjustable exhaust

DESCRIPTION

A900FN TF ART. NR. 4F0311N



TECHNICAL INFORMATION

Length	304 mm
Width	128 mm
Height	300 mm
Weight	2.49 kg
Actuation	TF
Air inlet	1/4" NPT
Operating pressure	4.9 – 8.3 bar
Air consumption	220 l/min
Magazine capacity	250-275

APPLICATIONS


Wall sheathing/Siding, Timber frame constructions, Fencing, Sub-flooring, Boarding and other wooden assembly work.

FEATURES

- Magnesium body
- Comfort grip
- Multi-directional exhaust deflector
- Adjustable depth of drive
- Runs both wire and plastic collated nails

DESCRIPTION

S65CNP TF ART. NR. 8G2001N





SENCO[®]



Senco compressors from small to large: for every application there's a Senco compressor. In addition to high quality professional tools, Senco also has a complete range of high quality compressors. There are oil free and oil lube versions available for a wide range of applications.

Senco compressors are designed to run at least 3.000 hours, leaving the competition behind.



SENCO[®]



COMPRESSORS, KITS & ACCESSORIES

For every application there's
a Senco compressor.

1
YEAR
LIMITED
WARRANTY

COM
PRESSOR

USE SENCO TOOLS

COMPRESSORS

MINI COMPRESSOR PC1010



TECHNICAL INFORMATION

Length	360 mm
Width	330 mm
Height	250 mm
Weight	9,1 kg
Power	230V / 0,3kW (0,5 pk)
RPM	2850
Tank capacity	3,8 l
Maximum pressure	8 bar
Displacement	34 l/min
Airflow (6-6,2 bar)	20 l/min
Noise level	68 db(A)

APPLICATIONS

Primarily finish, trim and upholstery

FEATURES

- Oil free
- Ultra light, hand carry
- Comfort grip
- Aluminium cylinder
- Silent and durable (3000 hours)

DESCRIPTION

0,3kW (0,5 hp) compressor (230V) PC1010EU

0,3kW (0,5 hp) compressor (110V) PC1010UK1

0,3kW (0,5 hp) compressor (230V) PC1010UK2

ART. NR.

MINI COMPRESSOR PC1248



TECHNICAL INFORMATION

Length	160 mm
Width	490 mm
Height	460 mm
Weight	16,8 kg
Power	230V / 1,1 kW (1,5 pk)
RPM	2850
Tank capacity	8,0 l
Maximum pressure	9 bar
Displacement	139 l/min
Airflow (6-6,2 bar)	79 l/min
Noise level	83 db(A)

APPLICATIONS

Finish, trim, upholstery, roofing, siding and sheathing

FEATURES

- Maintenance free
- Oil free
- Sturdy, lightweight
- Thermal overload protection
- Fully automated control

DESCRIPTION

1,1 kW (1,5 hp) compressor (230V) PC1248EU

1,1 kW (1,5 hp) compressor (110V) PC1248UK1

1,1 kW (1,5 hp) compressor (230V) PC1248UK2

ART. NR.

MINI COMPRESSOR PC0968



TECHNICAL INFORMATION

Length	400 mm
Width	380 mm
Height	340 mm
Weight	17 kg
Power	230V / 1,1 kW (1,5 pk)
RPM	2850
Tank capacity	10,0 l
Maximum pressure	9 bar
Displacement	113 l/min
Airflow (6-6,2 bar)	51 l/min
Noise level	81 db(A)

APPLICATIONS

Finish, trim, upholstery, roofing and siding

FEATURES

- Hand carry
- Ultra light
- Comfort grip
- Oil free
- Silent and durable (3000 hours)

DESCRIPTION

1,1 kW (1,5 hp) compressor (230V) PC0968EU

ART. NR.



SENCO[®]

**MIDI COMPRESSOR
PC1252**



**MIDI COMPRESSOR
PC1249**



**MIDI COMPRESSOR
PC1250**



TECHNICAL INFORMATION

Length	540 mm
Width	310 mm
Height	430 mm
Weight	23 kg
Power	230V / 1,5 kW (2 pk)
RPM	2850
Tank capacity	3,0 l
Maximum pressure	9 bar
Displacement	201 l/min
Airflow (6-6,2 bar)	122 l/min
Noise level	84 db(A)

APPLICATIONS

Finish, trim, roofing, siding, decking, subflooring, sheathing and framing

FEATURES

- Hand carry
- Sturdy, very compact and mobile
- Pressure switch with start-up valve
- Fully automated control
- Excellent for pneumatic caulk guns

DESCRIPTION

1,5 kW (2 hp) compressor (230V) PC1252EU

ART. NR.

TECHNICAL INFORMATION

Length	320 mm
Width	360 mm
Height	660 mm
Weight	30 kg
Power	230V / 1,5 kW (2 pk)
RPM	2850
Tank capacity	10,0 l
Maximum pressure	9 bar
Displacement	201 l/min
Airflow (6-6,2 bar)	133 l/min
Noise level	93 db(A)

APPLICATIONS

Finish, trim, upholstery, roofing, siding, decking, subflooring, sheathing, pallets and framing

FEATURES

- Sturdy mobile compressor
- Thermal overload protection
- Pressure regulator for controlled working pressure

DESCRIPTION

1,5 kW (2 hp) compressor (230V) PC1249EU

ART. NR.

TECHNICAL INFORMATION

Length	880 mm
Width	320 mm
Height	670 mm
Weight	42 kg
Power	230V / 1,5 kW (2 pk)
RPM	2850
Tank capacity	46,0 l
Maximum pressure	10 bar
Displacement	277 l/min
Airflow (6-6,2 bar)	164 l/min
Noise level	87 db(A)

APPLICATIONS

Finish, trim, roofing, siding, decking, subflooring, sheathing, pallets, framing, packaging

FEATURES

- Sturdy, high performance compressor
- Thermal overload protection
- Fully automated control
- Oil free

DESCRIPTION

1,5 kW (2 hp) compressor (230V) PC1250EU

ART. NR.

1,5 kW (2 hp) compressor (110V) PC1250UK1

COMPRESSORS

MAXI COMPRESSOR PC2225



TECHNICAL INFORMATION

Length	650 mm
Width	560 mm
Height	530 mm
Weight	39 kg
Power	230V / 1,9 kW (2,5 pk)
RPM	2850
Tank capacity	16,0 l
Maximum pressure	9 bar
Displacement	268 l/min
Airflow (6-6,2 bar)	192 l/min
Noise level	82 db(A)

APPLICATIONS

Finish, trim, roofing, siding, decking, subflooring, sheathing, pallets and framing

FEATURES

- Big wheels, stable and easy to move
- Die cast aluminium
- Compact design and strong frame
- Pump with cast iron sleeve

DESCRIPTION

1,9 kW (2,5 hp) compressor (230V) PC2225EU

ART. NR.

MAXI COMPRESSOR PC1251



TECHNICAL INFORMATION

Length	550 mm
Width	520 mm
Height	760 mm
Weight	37,5 kg
Power	230V / 1,9 kW (2,5 pk)
RPM	2850
Tank capacity	20,0 l
Maximum pressure	9 bar
Displacement	271 l/min
Airflow (6-6,2 bar)	164 l/min
Noise level	83 db(A)

APPLICATIONS

Finish, trim, upholstery, roofing, siding, decking, subflooring, sheathing, pallets and framing

FEATURES

- Sturdy mobile compressor
- Thermal overload protection
- Fully automated control
- Large non-inflatable rubber wheels

DESCRIPTION

1,9 kW (2,5 hp) compressor (230V) PC1251EU

ART. NR.

1,9 kW (2,5 hp) compressor (110V) PC1251UK1

MAXI COMPRESSOR PC1246



TECHNICAL INFORMATION

Length	650 mm
Width	530 mm
Height	850 mm
Weight	57 kg
Power	230V / 2,6 kW (3,5 pk)
RPM	2850
Tank capacity	16,0 l
Maximum pressure	10 bar
Displacement	350 l/min
Airflow (6-6,2 bar)	224 l/min
Noise level	89 db(A)

APPLICATIONS

Finish, trim, roofing, siding, decking, subflooring, sheathing, pallets and framing

FEATURES

- Compact design
- Thermal overload protection
- Pressure switch with start-up valve
- Instrument panel enables easy operation

DESCRIPTION

2,6 kW (3,5 hp) compressor PC1246UK2

ART. NR.



KIT COMPRESSOR PC1287EU



HP COMPRESSOR PC1286EU



TECHNICAL INFORMATION

Length	540 mm
Width	310 mm
Height	430 mm
Weight	28,5 kg
Power	230 V / 0,75 kW (1 pk)
RPM	1450
Tank capacity	3,0 l
Maximum pressure	15 bar
Displacement	131 l/min
Airflow (6-6,2 bar)	74 l/min
Noise level	77 db(A)

APPLICATIONS

Caulking, finish & trim, siding, decking

FEATURES

- Excellent for pneumatic caulk guns
- Sturdy, very compact and mobile
- Comfort grip
- Fully automated control
- Thermal overload protection

DESCRIPTION

Senco kit compressor

ART. NR.

PC1287EU

TECHNICAL INFORMATION

Length	620 mm
Width	425 mm
Height	320 mm
Weight	25 kg
Power	230V / 1,5 kW (2 pk)
RPM	2400
Tank capacity	10,0 l
Maximum pressure	27,5 bar
Displacement	70 l/min
Airflow (6-6,2 bar)	40 l/min
Noise level	80 db(A)

APPLICATIONS

30 bar application, features also a 8 bar connection, multiple machines at 8 bar

FEATURES

- Oil free
- Light weight, easy to move
- Dual safety valves
- Thermal overload protection

DESCRIPTION

High Pressure Compressor

ART. NR.

PC1286EU



KITS AND ACCESSORIES

COMPRESSOR KIT PC1010EU & 3 IN 1 SET



COMPRESSOR KIT PC1010EU/SLS18MG



COMPRESSOR KIT PC1010EU/FINISHPRO18MG



APPLICATIONS

Easy to transport. fits on every systainer and protects tools or compressor.

CONTENT

- PC1010

CONTENTS 3 IN 1

- SLS18Mg, page 24
- FIP18Mg, page 26
- FIP35Mg, page 27

DESCRIPTION	ART. NR.
Systainerset PC1010EU	3PR2014N
Systainer 3 in 1	3PR2012N
Systainerset PC1010 (110V)	3PR2014N-UK



APPLICATIONS

Cabinets, furniture, drawer assembly, case backs, picture frames

CONTENTS

- PC1010 Compressor
- SLS18-L Mg Medium wire stapler
- Including hose
- Including safety glasses
- Including blisterpack L staples

DESCRIPTION	ART. NR.
PC1010EU/SLS18Mg	PC0972EU
PC1010/SLS18Mg (110V)	PC0972UK



APPLICATIONS

Mouldings, furniture, decoration, trim, beading, cabinets and drawers, rattan furniture, finishing

CONTENTS

- PC1010 Compressor
- FinishPro18Mg Brad nailer
- Including hose
- Including safety glasses
- Including blisterpack AX brads

DESCRIPTION	ART. NR.
PC1010EU/FinishPro18Mg	PC0964EU
PC1010/FinishPro18Mg (110V)	PC0964UK1
PC1010/FinishPro18Mg (230V)	PC0964UK2



SENCO®

AIR ACCESSORY KIT



DESCRIPTION	ART. NR.
Air accessory kit;	400050
Washing pistol, tire inflating gun with pressure gauge, paint spray gun, air blow gun, hose	

AIRBLOW GUN



DESCRIPTION	ART. NR.
Airblow gun metal with Cejn coupling	400030
Airblow gun metal with Orion coupling	400031
Airblow gun blue with Orion coupling	400032

HOSE REEL



DESCRIPTION	ART. NR.
Hose reel universal auto PU	4000720
12m x 6,5mm	

HOSE REEL



DESCRIPTION	ART. NR.
Hose reel universal PU	4000730
30m x 8mm	

PLUG MALE



DESCRIPTION	ART. NR.
Universal NPT 1/4" 2 pcs.	4000100
Universal NPT 3/8" 2 pcs.	4000110
Universal NPT 1/2" 2 pcs.	4000120
Universal NPT 1/4" 10 pcs.	4000101
Universal NPT 3/8" 10 pcs.	4000111

PLUG FEMALE



DESCRIPTION	ART. NR.
Universal NPT 1/4" 2 pcs.	4000150
Universal NPT 3/8" 2 pcs.	4000160
Universal NPT 1/2" 2 pcs.	4000170
Universal NPT 1/4" 10 pcs.	4000151
Universal NPT 3/8" 10 pcs.	4000161

HOSE PLUG



DESCRIPTION	ART. NR.
Universal hose 6,5mm blist. 2 pcs.	4000200
Universal hose 8mm blist. 2 pcs.	4000210
Universal hose 10mm blist. 2 pcs.	4000220
Universal hose 12,7mm blist. 2 pcs.	4000230

HOSE REPAIR PLUG



DESCRIPTION	ART. NR.
6mm blist. 2 pcs.	4000480
8mm blist. 2 pcs.	4000490
9,5mm blist. 2 pcs.	4000500

HOSE CLAMP



DESCRIPTION	ART. NR.
10-16mm blist. 5 pcs.	4000520

ACCESSORIES

COUPLER MALE



NEW

DESCRIPTION	ART. NR.
Universal NPT 1/4" blist. 1 pcs.	4000300
Universal NPT 3/8" blist. 1 pcs.	4000310
Universal NPT 1/2" blist. 1 pcs.	4000320

COUPLER FEMALE



NEW

DESCRIPTION	ART. NR.
Universal NPT 1/4" blist. 1 pcs.	4000370
Universal NPT 3/8" blist. 1 pcs.	4000380
Universal NPT 1/2" blist. 1 pcs.	4000390

HOSE COUPLER



NEW

DESCRIPTION	ART. NR.
Universal 6,5mm blist. 1 pcs.	4000400
Universal 8mm blist. 1 pcs.	4000410
Universal 10mm blist. 1 pcs.	4000420
Universal 12,7mm blist. 1 pcs.	4000430

SPIRAL HOSE



NEW

DESCRIPTION	ART. NR.
Kit universal PU 6m x 6,5mm (i.d.)	4000600
Kit universal PU 6m x 8mm (i.d.)	4000610
Kit universal PU 6m x 10mm (i.d.)	4000620

AIR HOSE KIT



NEW

DESCRIPTION	ART. NR.
Kit universal 10m x 6,5mm (i.d.)	4000650
Kit universal 10m x 8mm (i.d.)	4000660
Kit universal 10m x 10mm (i.d.)	4000670
High pressure hose 15m	690400

AIR HOSE



NEW

DESCRIPTION	ART. NR.
PU 50m x 6,5mm (i.d.)	4000680
PU 50m x 8mm (i.d.)	4000690
PU 50m x 10mm (i.d.)	4000700

TEFLON TAPE



NEW

DESCRIPTION	ART. NR.
10m blist. 1 pcs.	4000540

SPRING BALANCER



NEW

DESCRIPTION	ART. NR.
Spring balancer cap. 1,5-3,0 kg.	4001000
Spring balancer cap. 3,0-5,0 kg.	4001001

LUBRICANTS



DESCRIPTION	ART. NR.
Tool lubricant 115 g	YB0123



SENCO®

LUBRICANTS



DESCRIPTION	ART. NR.
Tool lubrication 945 ml	PC1295
Lubrication Senco tools 235 ml	PC0101
Lubrication Senco tools 945 ml	PC0102
Lubrication Senco tools 3,78 l	PC0103

COMPRESSOR OIL



DESCRIPTION	ART. NR.
Compressor oil 945 ml	PC0344

SAFETY GLASSES



DESCRIPTION	ART. NR.
Senco safety glasses CE	PC1166
Senco safety glasses, tinted CE	PC1167

SERVICE REPAIR KITS



DESCRIPTION	ART. NR.
Firing/Trigger system kit SNS45XP	YK0230
Piston stop kit SNS45XP	YK0231
Firing system/trigger kit FrameProXP	YK0243
Piston stop kit FrameProXP	YK0244
Piston stop kit FinishPro25XP	YK0282
Piston stop kit SLS25XP	YK0291
Seal kit FramePro652	YK0353
Firing/trigger system kit SLS25XP	YK0359
Repair kit FramePro601/ 602/651/652	YK0360
Firing/Trigger system kit FiP41XP,42	YK0361
Repair kit FinishPro35	YK0365
Repair kit SCN60/65N	YK0366
Repair kit SFN40	YK0367
Repair kit SFN30	YK0368
Repair kit SFN40R	YK0369
Repair kit SLS20	YK0372
Repair kit SLP20	YK0373
Repair kit SNS40	YK0374
Repair kit SNS50XP/SQS55XP	YK0375
Repair kit SFN1, SKS, SPS	YK0376
Repair kit PW 2"	YK0378
Repair kit SLS15/18 FiP15/18/2N1	YK0393

STAPLE REMOVER



DESCRIPTION	ART. NR.
Senco staple remover	960037
Spare blade Senco staple remover	960038

DESCRIPTION	ART. NR.
Repair kit FiP10 new main body	YK0397
Repair kit PW150-200	YK0402
T-Driver kit FramePro701XP	YK0414
Piston-driver kit FramePro751XP	YK0416
T-Driver kit FramePro751XP	YK0417
Piston/driver kit FramePro702XP	YK0418
Firing/trigger system kit SNS44XP	YK0421
Piston stop kit SNS44XP	YK0422
Repair kit RP450	YK0426
Firing system kit SN901XP/902 951XP/952	YK0444EU
Piston stop kit SN901XP/902 SN951XP/952	YK0445EU
Repair kit PAL57	YK0446
Repair kit PAL70	YK0447
Piston stop kit SN951XP/952XP	YK0768EU
Repair kit SCN48	YK0769
Repair kit SCN75	YK0770
Repair kit SCN49	YK0771
Repair kit PAL50	YK0772
Repair kit PAL90	YK0774
Repair kit SFW09-C	YK0775EU
Repair kit PAL83	YK0779
Repair kit FinishPro18Mg	YK0780
Repair kit WC150XP/WC200XP	YK0783EU
Repair kit WC150XP/WC200XP	YK0784EU
Repair kit SCN34	YK0785
Repair kit SN1302	YK0789EU
Repair kit SC15	YK0790EU
Driver/back plate upgrade kit SNS44	YK0793
Driver/back plate upgrade kit SNS41	YK0794
Drive assembly Fusion FN65DA	YK0798EU
Cylinder assembly Fusion FN55AX	YK0799EU
Drive assembly Fusion FN65RHS	YK0801EU
Repair kit SFT10XP	YK0802EU
Repair kit SFT10XP	YK0803EU
Repair kit SFT10XP	YK0804EU
Cap assembly upgraded WC150XP	YK0818
Drive assembly Fusion FN65RHA	YK0822EU
Long Magazine kit SGP40-S	YK0837EU
Trigger valve system kit SHS51XP	YK0838EU
Piston stop kit SHS51XP	YK0839EU
Trigger valve system kit SHS50XP	YK0840EU
Piston stop kit SHS50XP	YK0841EU

Senco nailers with Fusion Technology use compressed air that is permanently sealed in the tool's self-contained, built-in cylinder to unleash a shot of pure, portable pneumatic power every time you pull the trigger. You don't need to buy costly gas cells. There's no smelly exhaust, no ramp up time and virtually no cleaning or servicing costs.

Senco Gas tools have proven their cordless convenience in a variety of applications, ranging from wood construction to 2nd fix applications.



SENCO®



CORDLESS

Cordless convenience
pneumatic power

2 YEAR
LIMITED
WARRANTY

**CORD
LESS**

USE SENCO TOOLS

STRIPNAILERS

FINISH NAILER 1,8MM F-15 FUSION



TECHNICAL INFORMATION

Length	330 mm
Width	76 mm
Height	348 mm
Weight	2,8 kg
Actuation	BF (TF)
Battery	18V Li-ion
Recharge time	45 min
Magazine capacity	110

APPLICATIONS


Finish and trim, baseboard, cabinets and caskets, chair rail, decorative trim, door & window, casing, furniture trim, paneling

FEATURES

- Fusion cordless pneumatic technology
- Adjustable depth of drive
- 18V Li-ion battery
- Selectable trigger

DESCRIPTION ART. NR.

Fusion FN65DA BF/TF	5N2001N
Fusion FN65DA BF/TF+	5N2501N
1 extra battery	
Fusion FN65DA BF/TF UK	5N7001N
Fusion FN65DA BF/TF UK +	5N7501N
1 extra battery	



FINISH NAILER 1,6MM F-16A FUSION



TECHNICAL INFORMATION

Length	279 mm
Width	76 mm
Height	330 mm
Weight	2,7 kg
Actuation	BF (TF)
Battery	18V Li-ion
Recharge time	45 min
Magazine capacity	100

APPLICATIONS


All 2nd-fix applications including architrave, dado, skirting, casings, baseboards, frames

FEATURES

- Fusion cordless pneumatic technology
- Adjustable depth of drive
- 18V Li-ion battery
- Selectable trigger

DESCRIPTION ART. NR.

Fusion FN65RHA BF/TF	5P2001N
Fusion FN65RHA BF/TF +	5P2501N
1 extra battery	
Fusion FN65RHA BF/TF UK	5P7001N
Fusion FN65RHA BF/TF UK +	5P7501N
1 extra battery	



FINISH NAILER 1,6MM F-16S FUSION



TECHNICAL INFORMATION

Length	330 mm
Width	76 mm
Height	330 mm
Weight	2,7 kg
Actuation	BF (TF)
Battery	18V Li-ion
Recharge time	45 min
Magazine capacity	100

APPLICATIONS


All 2nd-fix applications including architrave, dado, skirting, casings, baseboards, frames

FEATURES

- Fusion cordless pneumatic technology
- Adjustable depth of drive
- 18V Li-ion battery
- Selectable trigger

DESCRIPTION ART. NR.

Fusion FN65RHS BF/TF	6U2001N
Fusion FN65RHS BF/TF +	6U2501N
1 extra battery	
Fusion FN65RHS BF/TF UK	6U7001N
Fusion FN65RHS BF/TF UK +	6U7501N
1 extra battery	





SENCO®

BRAD NAILER 1,2MM F-18 FUSION



TECHNICAL INFORMATION

Length	279 mm
Width	76 mm
Height	343 mm
Weight	2,7 kg
Actuation	BF (TF)
Battery	18V Li-ion
Recharge time	45 min
Magazine capacity	110

APPLICATIONS

Molding and decorative trim, furniture trim, window beading, blind pinning of upholstered and trim panels, rattan, scribe molding, cabinets, drawers and picture frame assembly


FEATURES

- Fusion cordless pneumatic technology
- Adjustable depth of drive
- 18V Li-ion battery
- Selectable trigger

DESCRIPTION

ART. NR.

Fusion FN55AX BF/TF	6E2001N
Fusion FN55AX BF/TF + 1 extra battery	6E2501N
Fusion FN55AX BF/TF UK	6E7001N
Fusion FN55AX BF/TF UK + 1 extra battery	6E7501N



STRIPNAILERS

BRAD NAILER 1,2MM GT50AX



TECHNICAL INFORMATION

Length	320 mm
Width	86 mm
Height	285 mm
Weight	2,3 kg
Actuation	TF
Battery	6V Ni-MH
Recharge time	2 hours
Fuel cell	18g (31,5x80 mm)
Magazine capacity	100

APPLICATIONS


Molding and decorative trim, furniture trim, window beading, blind pinning of upholstered and trim panels, rattan, scribe molding, cabinets, drawers and picture frame assembly

FEATURES

- High voltage ignition
- Adjustable depth of drive
- EZ-Clear Nose
- Works in all weather conditions

DESCRIPTION

DESCRIPTION	ART. NR.
GT50AX TF	7R2001N
GT50AX Restr. UK	7R7001N



FINISH NAILER 1,6MM GT65RHA



TECHNICAL INFORMATION

Length	340 mm
Width	86 mm
Height	340 mm
Weight	2,1 kg
Actuation	TF
Battery	6V Ni-MH
Recharge time	2 hours
Fuel cell	18g (31,5x80 mm)
Magazine capacity	100

APPLICATIONS


All 2nd-fix applications including architrave, dado, skirting, casings, baseboards, frames

FEATURES

- High voltage ignition
- Works in all weather conditions
- Adjustable depth of drive
- EZ-Clear Nose

DESCRIPTION

DESCRIPTION	ART. NR.
GT65RHA TF	5S2001N
GT65RHA Restr. UK	5S7001N



FINISH NAILER 1,6MM GT65RHS



TECHNICAL INFORMATION

Length	312 mm
Width	86 mm
Height	300 mm
Weight	2,3 kg
Actuation	TF
Battery	6V 1,5 Ah Ni-MH
Recharge time	2 hours
Fuel cell	18g (31,5x80 mm)
Magazine capacity	100

APPLICATIONS


All 2nd-fix applications including architrave, dado, skirting, casings, baseboards, frames

FEATURES

- High voltage ignition
- Works in all weather conditions
- Adjustable depth of drive
- EZ-Clear Nose

DESCRIPTION

DESCRIPTION	ART. NR.
GT65RHS TF	6D2001N
GT65RHS Restr. UK	6D7001N



FINISH NAILER 1,8MM GT65DA



TECHNICAL INFORMATION

Length	318 mm
Width	91 mm
Height	362 mm
Weight	2,4 kg
Actuation	TF
Battery	6V 1,5 Ah Ni-MH
Recharge time	2 hours
Fuel cell	18g (31,5x80 mm)
Magazine capacity	110


APPLICATIONS

Finish and trim, baseboard, cabinets and caskets, chair rail, decorative trim, door & window, casing, furniture trim, paneling

FEATURES

- High voltage ignition
- Adjustable depth of drive
- EZ-Clear Nose
- Works in all weather conditions

DESCRIPTION	ART. NR.
GT65DA TF	5R2001N
GT65DA Restr. UK	5R7001N



CH FRAMING NAILER GT90CH



TECHNICAL INFORMATION

Length	371 mm
Width	107 mm
Height	376 mm
Weight	3,6 kg
Actuation	TF
Battery	6V 1,5 Ah Ni-MH
Recharge time	2 hours
Fuel cell	40g (31,5x165 mm)
Magazine capacity	70


APPLICATIONS

Timber frame, subfloors, pallets and crates, decking, shuttering, frames

FEATURES

- High voltage ignition
- Adjustable depth of drive
- Durable metal magazine
- Comfort grip
- Works in all weather conditions

DESCRIPTION	ART. NR.
GT90CH TF	5F2001N
GT90CH Restr. UK	5F7001N



FRH FRAMING NAILER GT90FRH



TECHNICAL INFORMATION

Length	371 mm
Width	107 mm
Height	376 mm
Weight	3,6 kg
Actuation	TF
Battery	6V 1,5 Ah Ni-MH
Recharge time	2 hours
Fuel cell	40g (31,5x165 mm)
Magazine capacity	70


APPLICATIONS

Timber frame, subfloors, pallets and crates, decking, shuttering, frames

FEATURES

- High voltage ignition
- Adjustable depth of drive
- Durable metal magazine
- Comfort grip
- Works in all weather conditions

DESCRIPTION	ART. NR.
GT90FRH TF	5G2001N
GT90FRH Restr. UK	5G7001N



STRIPNAILERS / ACCESSORIES

CONCRETE NAILER SGP40S



TECHNICAL INFORMATION

Length	340 mm
Width	107 mm
Height	380 mm
Weight	4,0 kg
Actuation	TF
Battery	6V 1,5 Ah Ni-MH
Recharge time	2 hours
Fuel cell	40g (31,5x165 mm)
Magazine capacity	22

APPLICATIONS

Ceiling grid to concrete, fastening of drywall track

FEATURES

- High voltage ignition
- Adjustable depth of drive
- Interchangeable short and long magazine
- Comfort grip
- Rear loading

DESCRIPTION	ART. NR.
SGP40S Restr.	5H9211N
SGP40L with long Magazine	5H9211N-L
SGP40S Restr. (UK)	5H9711N



METAL CONNECTOR GT60NN



TECHNICAL INFORMATION

Length	355 mm
Width	108 mm
Height	393 mm
Weight	3,6 kg
Actuation	TF
Battery	6V 1,4 Ah Ni-MH
Recharge time	2 hours
Fuel cell	40g (31,5x165 mm)
Magazine capacity	20

APPLICATIONS

Pre-drilled metal plates, pre-drilled metal strips, joist hanger

FEATURES

- High voltage ignition
- Adjustable depth of drive
- Rear loading
- Overhanging nail tip for locates pre-punched hols

DESCRIPTION	ART. NR.
GT60NN TF	7N2001N
GT60NN Restr. UK	7N7001N



GAS TOOL LUBRICATION



DESCRIPTION	ART. NR.
Gas tool lubrication 100 ml	PC1236

UNIVERSAL FUEL CELL KIT

Universal kit, fits other tools



DESCRIPTION	ART. NR.
Premium fuel cells 2x 25 gr. + adapter	PC1311

FUEL CELLS



NEW

DESCRIPTION	ART. NR.
Premium fuel cell 40 gr.	PC1308
Premium fuel cell 18 gr.	PC1309
Premium fuel cells 2 x 40 gr. (blis)	PC1307
Premium fuel cells 2 x 18 gr. (blis)	PC1310



SENCO®

GAS TOOL CLEANER



DESCRIPTION	ART. NR.
Tool cleaner for gas tools 100 ml	PC1235

GAS TOOL CLEANING KIT



DESCRIPTION	ART. NR.
Gas tool cleaning kit	PC1239

GAS TOOL BATTERIES



DESCRIPTION	ART. NR.
Gas tools battery 6V	VB0109EU

GAS TOOL BATTERY CHARGER



DESCRIPTION	ART. NR.
Gas tools battery charger	VA0058EU
Adapter 220V	VB0115EU

FUSION BATTERIES



DESCRIPTION	ART. NR.
Fusion battery 18V Li-ion 1,5 Ah	VB0160EU
Fusion battery 18V Li-ion 3,0 Ah	VB0162EU

FUSION BATTERY CHARGER



DESCRIPTION	ART. NR.
Fusion tools battery charger 18V Li-ion	VB0157EU

CAR ADAPTOR FOR GAS TOOL BATTERIES



DESCRIPTION	ART. NR.
Gas tool battery car adaptor (12V)	PC1196



Senco fasteners guarantee a fault-free use of Senco tools and a perfect finish. All Senco fasteners are produced according to international standards, like CE.



SENCO®



FASTENERS

•USE•
GENUINE
SENCO®
FASTENERS™

**FAST
ENER**

USE SENCO FASTENERS

CE / INDEX

CE MARKING ON FASTENERS

Many building products used for on-site construction and factory manufacture throughout the EU require the CE mark. This logo shows that the product has been tested with the appropriate European harmonised test method. This ensures that the products are safe to use and provides important information about the essential characteristics for use in the intended application. The rules for CE marking were tightened on July 1st, 2013 with the introduction of the new Construction Products Regulation (305/2011).

With the introduction new Construction Products Regulation (CPR) you are required to show the Declaration of Performance of the product next to the CE marking. The aim of the declaration is to inform architects, structural engineers and contractors about the essential performance characteristics of the product, thereby providing the necessary information to ensure the product is suitable for use in a building or any part of it in order to meet the design requirements package.


Senco fasteners intended for use in structural timber applications are manufactured in accordance with the requirements outlined in EN14592. In the Declaration of Performance product details are listed with the relevant flexural strength, pull-out and pull-through values, tensile strength and climatic resistance classification indicated.

Fasteners for the mechanical fixing of plasterboard meet the standards of EN14566 which is tested for exposure to fire class A1 according to and flexibility without breakage phenomena.

Performance statements for Senco fasteners manufactured in accordance with the Construction Products Regulation can be found on the following website: www.senco-emea.com



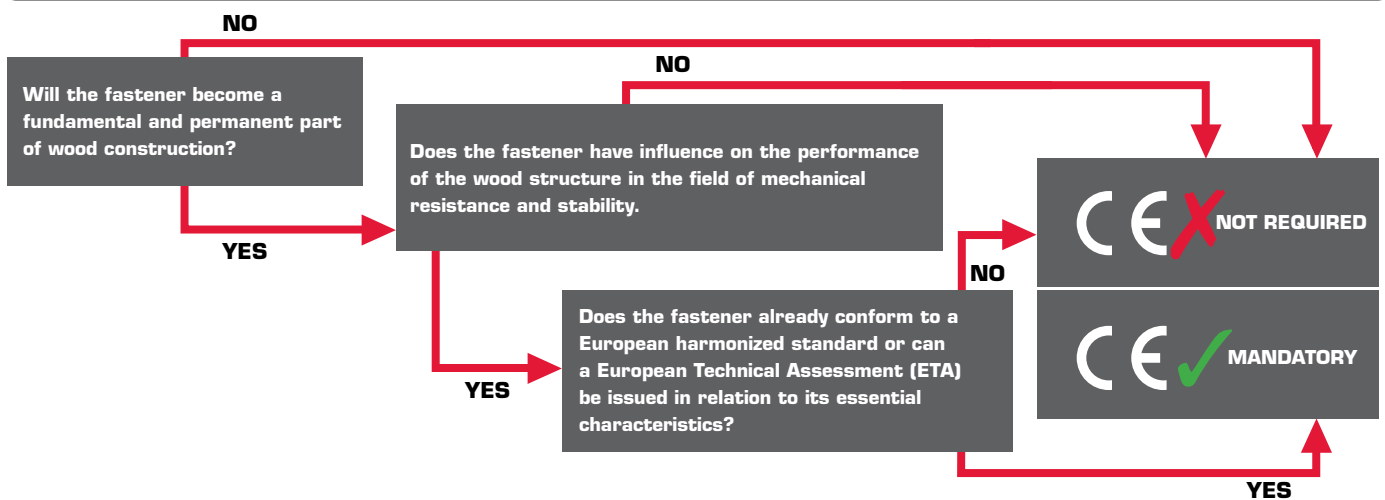


WHEN DOES MY FASTENER NEED CE MARKING?






SERVICE CLASS

	SERVICE CLASS 1  indoor use	SERVICE CLASS 2  outdoor protected	SERVICE CLASS 3  outdoor use
For nails & screws Ø ≤ 4mm	None	1) 12µm electrolytic galvanized 2) 30µm mechanical galvanized	1) 25µm electrolytic galvanized 2) 50µm hot dip galvanized
	Bright Basic Electrolytic galvanized <12µ Electrolytic galvanized 12µ Mechanical galvanized 50µ Electrolytic galvanized 25µ Hot dip galvanized 50µ		
Staples	1) 12µm electrolytic galvanized	1) 12µm electrolytic galvanized	Stainless Steel
	Electrolytic galvanized 12µ Stainless Steel		


INDEX

Senco offers a wide range of fasteners. For every application, data sheets are available with different specifications, such as point geometry, material and surface coating. For advice contact your Senco dealer.

STAPLE POINTS

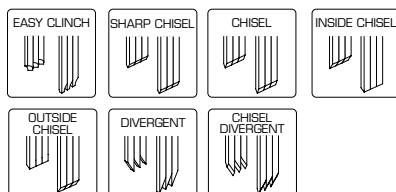

NAIL POINTS




MATERIAL / FINISH

BB	Bright Basic	HDG 55µ	Hot dip galvanized
GALV <12µ	Electrolytic galvanized <12µ	AISI 304	Stainless Steel
GALV 12µ	Electrolytic galvanized 12µ	AISI 316	Stainless Steel
GALV 30µ	Mechanical galvanized 30µ	ALU	Aluminum

USE SENCO FASTENERS

STAPLES

LIGHT STAPLE A STAPLE



TECHNICAL INFORMATION

Crown size	4,8 mm
Length	4-16 mm

LIGHT STAPLE AT (80) STAPLE



TECHNICAL INFORMATION

Crown size	12,7 mm
Length	6-16 mm

LIGHT STAPLE B STAPLE



TECHNICAL INFORMATION

Crown size	12,7 mm
Length	4-16 mm

LIGHT STAPLE C STAPLE



TECHNICAL INFORMATION

Crown size	9,5 mm
Length	2-16 mm

LIGHT STAPLE E STAPLE



TECHNICAL INFORMATION

Crown size	4,8 mm
Length	6-16 mm

LIGHT STAPLE F STAPLE



TECHNICAL INFORMATION

Crown size	12,7 mm
Length	6-16 mm

LIGHT STAPLE G STAPLE



TECHNICAL INFORMATION

Crown size	9,5 mm
Length	6-16 mm


LIGHT STAPLE H STAPLE



TECHNICAL INFORMATION

Crown size	11,1 mm
Length	8-14 mm

LIGHT STAPLE J STAPLE



TECHNICAL INFORMATION

Crown size	12,1 mm
Length	10-16 mm



SENCO®


MEDIUM STAPLE 92 STAPLE



TECHNICAL INFORMATION

Crown size 8,5 mm
Length 18-40 mm


MEDIUM STAPLE K STAPLE



TECHNICAL INFORMATION

Crown size 6,4 mm
Length 12-25 mm


MEDIUM STAPLE L STAPLE



TECHNICAL INFORMATION

Crown size 6,4 mm
Length 12-38 mm


MEDIUM STAPLE M STAPLE



TECHNICAL INFORMATION

Crown size 9,5 mm
Length 12-38 mm


MEDIUM STAPLE N STAPLE



TECHNICAL INFORMATION

Crown size 11,1 mm
Length 16-63 mm


MEDIUM STAPLE O (14) STAPLE



TECHNICAL INFORMATION

Crown size 11,1 mm
Length 25-50 mm


HEAVY STAPLE P STAPLE



TECHNICAL INFORMATION

Crown size 25,4 mm
Length 12-50 mm


HEAVY STAPLE Q STAPLE



TECHNICAL INFORMATION

Crown size 11,4 mm
Length 38-63 mm

HEAVY STAPLE S STAPLE




TECHNICAL INFORMATION

Crown size 12,2 mm
Length 70-90 mm

USE SENCOS FASTENERS

STAPLES / STRIPNAILS


HEAVY STAPLE SP STAPLE



TECHNICAL INFORMATION

Crown size	27,9 mm
Length	75-160 mm


PACKAGING STAPLE 1 STAPLE



TECHNICAL INFORMATION

Crown size	35 mm
Length	15-22 mm


PACKAGING STAPLE U STAPLE

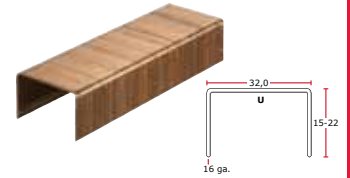

TECHNICAL INFORMATION

Crown size	32 mm
Length	15-22 mm


1,8 MM SMOOTH (DA)



TECHNICAL INFORMATION

Head type	Counter sink
Length	25-63 mm
Angle	34°


2,3 MM SMOOTH (EC)



TECHNICAL INFORMATION

Head type	Clipped head
Length	45-60 mm
Angle	34°


2,9 MM BARBED (GB)



TECHNICAL INFORMATION

Head type	Full round head
Length	50-75 mm
Angle	17°/ 20°


2,9 MM SMOOTH (GC)



TECHNICAL INFORMATION

Head type	Clipped head
Length	50-85 mm
Angle	34°


2,9 MM RING (GE)



TECHNICAL INFORMATION

Head type	Clipped head
Length	50-80 mm
Angle	34°

3,1 MM BARBED (HB)




TECHNICAL INFORMATION

Head type	Full round head
Length	90 mm
Angle	17°/20°



SENCO[®]


3,1 MM SMOOTH (HC)



TECHNICAL INFORMATION

Head type	Clipped head
Length	70-100 mm
Angle	34°


3,1 MM RING (HE)



TECHNICAL INFORMATION

Head type	Clipped head
Length	80-90 mm
Angle	34°


3,3 MM SMOOTH (KC)



TECHNICAL INFORMATION

Head type	Clipped head
Length	90-100 mm
Angle	34°


3,8 MM SMOOTH (MD)



TECHNICAL INFORMATION

Head type	Full round head
Length	100-130 mm
Angle	20°/ 24°


4,2 MM SMOOTH (OD)



TECHNICAL INFORMATION

Head type	Full round head
Length	130-160 mm
Angle	20°/ 24°


**4,1 MM RING (NN)
METAL CONNECTOR**



TECHNICAL INFORMATION

Head type	Full round head
Length	40-60 mm
Angle	34°


**1,6 MM BARBED (RW)
FLOORING CLEAT**



TECHNICAL INFORMATION

Head type	L cleat head
Length	38-50 mm
Angle	0°

4,6 MM SMOOTH (TD)



TECHNICAL INFORMATION

Head type	Full round head
Length	145-160 mm
Angle	20°/ 24°



USE SENCO FASTENERS

COILNAILS


2,1 MM SMOOTH (SC)



TECHNICAL INFORMATION

Head type	Flat head
Length	32-50 mm
Angle	16°
Collation	Angular wire collation
Winding	Conical wound


2,1 MM RING (SE)



TECHNICAL INFORMATION

Head type	Flat head
Length	32-50 mm
Angle	16°
Collation	Angular wire collation
Winding	Conical wound


2,1 MM RING (SG)



TECHNICAL INFORMATION

Head type	Cupped head
Length	35-50 mm
Angle	16°
Collation	Angular wire collation
	Angular plastic collation
Winding	Flat wound


2,1 MM SMOOTH (SS)



TECHNICAL INFORMATION

Head type	Dome head
Length	35-50 mm
Angle	16°
Collation	Angular wire collation
	Angular plastic collation
Winding	Conical wound
	Flat wound

1,6 MM SMOOTH (RC)



TECHNICAL INFORMATION

Head type	Flat head
Length	25-32 mm
Angle	16°
Collation	Angular wire collation
	Angular plastic collation
Winding	Conical wound

1,6 MM SMOOTH (RD)



TECHNICAL INFORMATION

Head type	Flat head
Length	19 mm
Angle	0°
Collation	Angular plastic collation
Winding	Flat wound



SENCO[®]


1,6 MM RING (RL)



TECHNICAL INFORMATION

Head type	Flat head
Length	25-32 mm
Angle	0°
Collation	Angular plastic collation
Winding	Flat wound

1,8 MM RING (DL)



TECHNICAL INFORMATION

Head type	Flat head
Length	19-25 mm
Angle	0°
Collation	Angular plastic collation
Winding	Flat wound

2,3 MM SMOOTH (ED)



TECHNICAL INFORMATION

Head type	Flat head
Length	50-65 mm
Angle	0°/16°
Collation	Angular wire collation
Winding	Flat wound

2,3 MM RING (EL)



TECHNICAL INFORMATION

Head type	Flat head
Length	38-65 mm
Angle	0°/16°
Collation	Angular wire collation
Winding	Flat wound


2,5 MM RING (BG)



TECHNICAL INFORMATION

Head type	Cupped head
Length	35 mm
Angle	16°
Collation	Angular wire collation
Winding	Flat wound

2,5 MM SMOOTH (BJ)




TECHNICAL INFORMATION

Head type	Flat head
Length	50-70 mm
Angle	16°
Collation	Angular wire collation
Winding	Flat wound

USE SENCOS FASTENERS

COILNAILS


2,5 MM RING (BL)



TECHNICAL INFORMATION

Head type	Flat head
Length	50-75 mm
Angle	16°
Collation	Angular wire collation
Winding	Flat wound


2,5 MM RING (BS)



TECHNICAL INFORMATION

Head type	Dome head
Length	35-65 mm
Angle	16°
Collation	Angular wire collation
Winding	Flat wound


2,9 MM SMOOTH (GD)



TECHNICAL INFORMATION

Head type	Flat head
Length	65-90 mm
Angle	16°
Collation	Angular wire collation
Winding	Flat wound

2,9 MM RING (GL)



TECHNICAL INFORMATION

Head type	Flat head
Length	50-90 mm
Angle	16°
Collation	Angular wire collation
Winding	Flat wound


2,9 MM SCREW (GK)



TECHNICAL INFORMATION

Head type	Full round head
Length	50-90 mm
Angle	16°
Collation	Angular wire collation
Winding	Flat wound

2,9 MM RING (GS)



TECHNICAL INFORMATION

Head type	Dome head
Length	70-80 mm
Angle	16°
Collation	Angular wire collation
Winding	Flat wound



3,1 MM BARBED (HB)



TECHNICAL INFORMATION

Head type	Flat head
Length	90 mm
Angle	16°
Collation	Angular wire collation
Winding	Flat wound

3,1 MM SMOOTH (HD)



TECHNICAL INFORMATION

Head type	Flat head
Length	80-90 mm
Angle	16°
Collation	Angular wire collation
Winding	Flat wound


3,1 MM SMOOTH (HJ)



TECHNICAL INFORMATION

Head type	Large flat head
Length	19-38 mm
Angle	16°/20°
Collation	Angular wire collation
Winding	Conical wound


3,1 MM RING (HL)



TECHNICAL INFORMATION

Head type	Flat head
Length	65-90 mm
Angle	16°/20°
Collation	Angular wire collation
Winding	Flat wound


3,3 MM SMOOTH (KR)



TECHNICAL INFORMATION

Head type	Duplex head
Length	55-75 mm
Angle	16°
Collation	Angular wire collation
Winding	Flat wound

3,8 MM SMOOTH (MD)




TECHNICAL INFORMATION

Head type	Flat head
Length	120 mm
Angle	20°/24°
Collation	Angular wire collation
Winding	Flat wound

USE Senco FASTENERS

PINS AND BRADS / OTHERS


1,2 MM BRAD (AX)



TECHNICAL INFORMATION

Diameter	18 ga, 1,2 mm
Shank type	Smooth
Head type	Medium head
Length	15-55 mm
Angle	0°


1,2 MM BRAD (AY)



TECHNICAL INFORMATION

Diameter	18 ga, 1,2 mm
Shank type	Smooth
Head type	Slight head
Length	15-42 mm
Angle	0°

1,2 MM BRAD (AZ)

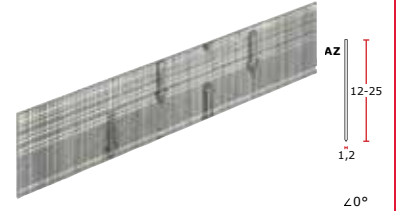

TECHNICAL INFORMATION

Diameter	18 ga, 1,2 mm
Shank type	Smooth
Head type	Headless
Length	12-25 mm
Angle	0°


0,6 MM PIN (CZ)



TECHNICAL INFORMATION

Shank type	Smooth
Head type	Headless
Length	12-25 mm
Angle	0°


1,6 MM BRAD (RH)



TECHNICAL INFORMATION

Diameter	16 ga, 1,6 mm
Shank type	Smooth
Head type	T head
Length	32-65 mm
Angle	20°

1,6 MM BRAD (RX)



TECHNICAL INFORMATION

Diameter	16 ga, 1,6 mm
Shank type	Smooth
Head type	T head
Length	25-65 mm
Angle	0°




PREMIUM CONCRETE PINS (SCP)



TECHNICAL INFORMATION

Diameter	2,7 mm
	3,1 mm
Head type	Full round head
Length	15-40 mm

REGULAR CONCRETE PINS (SCP)



TECHNICAL INFORMATION

Diameter	2,7 mm
	3,1 mm
Head type	Full round head
Length	15-40 mm


2,2 MM T-NAIL (PH)



TECHNICAL INFORMATION

Diameter	2,2 mm
	2,5 mm
Shank type	Smooth
Head type	T head
Length	18-64 mm


33,6 MM CORRUGATED (WM)



TECHNICAL INFORMATION

Length	25 mm
--------	-------

25,4 MM CORRUGATED (X)



TECHNICAL INFORMATION

Length	9-15 mm
--------	---------

11,6 MM SENCLAMP (Y)



TECHNICAL INFORMATION

Length	8-14 mm
--------	---------

STAPLE CODING CHART

1ST DIGIT CROWN & WIDTH & THICK MM			
Carton close (crown35mm)			
1(XB)	35,00	2,30	0,09
A	4,76	0,76	0,55
B	12,70	0,76	0,55
C	9,53	0,76	0,55
D	4,76	0,76	0,55
E	4,76	1,27	0,48
F	12,70	1,27	0,48
G	9,53	1,14	0,58
H	11,11	1,27	0,48
J	11,11	1,91	0,58
K	6,35	1,14	0,76
L	6,35	1,27	1,12
M	9,53	1,27	1,12
N	11,11	1,57	1,40
O	11,11	1,45	1,27
P	25,40	1,57	1,40
Q	11,11	1,88	1,70
R	4,76	1,14	0,76
RS	11,11	2,08	1,91
S	11,11	2,08	1,91
T	25,40	2,16	1,78
Carton close (crown32mm)			
U	31,50	1,91	0,89
V	19,05	2,21	0,38
W	4,76	0,81	0,64
Corrugated (crown25mm)			
X	25,40	2,18	0,51
Y	11,11	2,08	0,51
Special fastener			
AT	12,70	0,89	0,64
SP	25,40	2,03	1,80
P88	12,70	1,30	0,51
92	8,47	1,22	0,89
100	11,11	1,57	1,40

2ND & 3RD DIGITS LENGTH	
01	3mm
02	4mm
03	5mm
04	6mm
05	8mm
06	10mm
07	11mm
08	12mm
09	14mm
10	16mm
11	19mm
12	22mm
13	25mm
14	28mm
15	32mm
16	35mm
17	38mm
18	41mm
19	44mm
20	48mm
21	50mm
22	54mm
23	56mm
24	60mm
25	63mm
26	70mm
27	76mm
28	82mm
29	90mm
30	100mm
36	110mm
41	120mm
45	130mm
48	140mm
54	150mm

4TH DIGIT POINT	
A	Blunt
B	Chisel
C	Inside chisel
D	Outside chisel
E	Easy clinch
F	Divergent
G	Outside chisel divergent
H	Cross cut chisel
J	Cross cut chisel divergent
L	Chisel divergent
M	Self clinch
N	Sharp chisel

5TH DIGIT WIRE CHEMISTRY & FINISH	
A	Regular galvanised std tensile
B	Regular galvanised high tensile
C	Liquor finish, standard tensile
D	Liquor finish, ultra high tensile
E	Liquor finish, low tensile
F	Senclamp
G	Stainless steel, AISI 304 (A2)
H	Stainless steel, high tensile, AISI 304
K	Steel core aluminum
L	Steel core bronze
M	Aluminium
N	Bronze
P	Regular galvanised (flash 0 or greater)
Q	Class 1 galvanised, standard tensile
R	Bright basic, standard tensile
S	Special hardened steel
U	Stainless steel, AISI 316 (A4)
X	Xtra heavy electro galvanized 12 micron

6TH DIGIT FINISH	
A	Plain
B	Sencoted
C	Painted
D	Painted / Sencoted
E	Coated



EXAMPLE: C06BAAP

1 2 3 4 5 6 7

1 C	9,53	0,76	0,55	2 3 06	10mm	4 B	Chisel	5 A	Regular galvanised std tensile	6 A	Plain
--------	------	------	------	-----------	------	--------	--------	--------	--------------------------------	--------	-------




SENCO®

7TH DIGIT FEATURES

B	Band production for heavy staples
L	Special leg length
N	Carton / label / count change
P	Bulk pack
S	Special strong glue
T	Taped strips
V	Angular strips
Z	Coiled staple

8TH DIGIT SOURCE ETC.

HL	Strong adhesive
123	Number represents RAL code/color of staple back
9005	Completely black band production

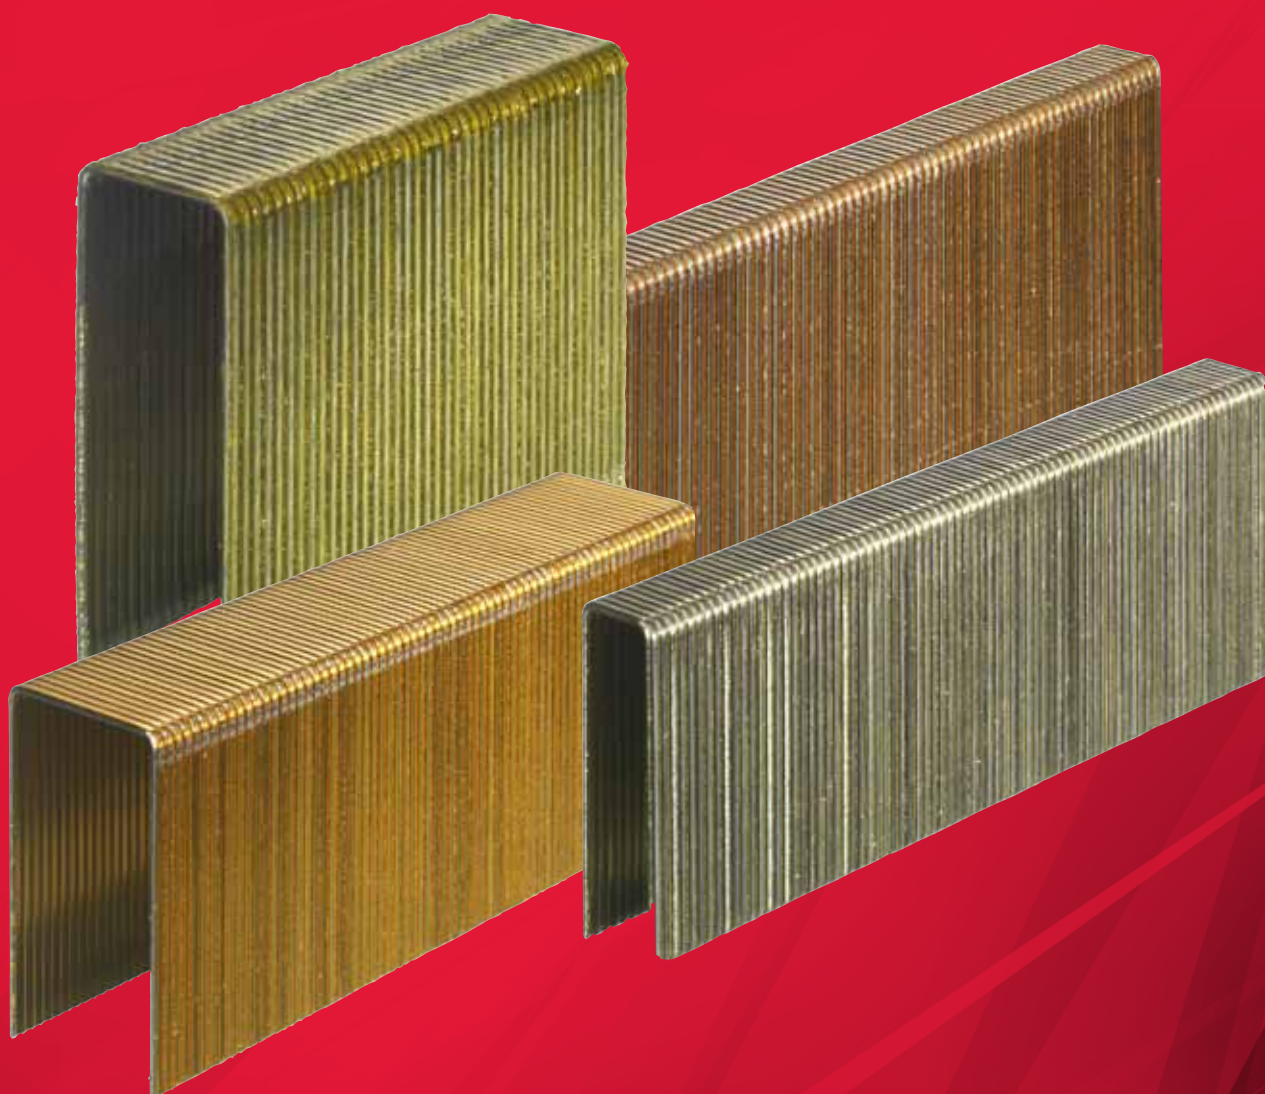


7

P Bulk pack

USE SENCOS FASTENERS

STRIPNAIL CODING CHART

1ST DIGIT GAUGE & DIA (MM)		2ND DIGIT HEAD/SHANK CONFIGURATION		3RD & 4TH DIGITS LENGTH			5TH DIGIT POINT		6TH DIGIT WIRE CHEMISTRY & FINISH	
				mm US						
A	18 Gauge	A	Brad head	46	35mm	16	A	Diamond	A	Regular galvanised std tensile
B	2,5 mm	B	Barbed, full round head	47	40mm	18	B	Blunt dia	C	Liquor finish
C	23 Gauge, 0,68 mm	C	Flat head, smooth for clipped head stripnails	49	45mm	19	C	Blunt	D	"Wheatherex II" galvanised
D	15 Gauge, 1,8 mm	D	Flat head, smooth shank, plastic collated, full round head	51	50mm	21	D	Blunt chisel	G	Stainless steel, AISI 304 (A2)
E	2,3 mm	E	Flat head, ring for clipped head stripnails	52	55mm	22	E	Sharp chisel	H	Bright basic, heat-treated
F	2,46 mm	F	Flat head, screw for clipped head stripnails	54	60mm	24	F	Chisel	I	Regular galvanised, heat-treated
G	2,87 mm	H	"T" head, smooth shank, full round head stripnails	55	65mm	25	G	Semi-blunt	J	Hot-dipped galvanised - corrosivity class 2
H	3,1 mm	K	Flat head, screw shank, plastic collated stripnails, full round head	56	70mm	26	H	Clinch point	K	Hot-dipped galvanised - corrosivity class 4
K	3,3 mm	L	Flat head, ring shank, plastic collated stripnails, full round head	57	75mm	27			M	Aluminium
M	3,8 mm	N	Full round head metal connector nail, aggressive ring DIN1052	58	80mm	28			P	Bright basic, std tensile
N	4,1 mm	P	Full round head metal connector nail, aggressive ring	59	90mm	29			R	Regular galvanised, yellow chromated
O	4,2 mm	Q	Flat head, 1/3rd ring, for full round head nails	60	100mm	31			S	Hot-dipped galvanised - corrosivity class 3
P	2,2 mm	S	Flat, ring, dome full round head	61	110mm	32			T	"Flash" galvanised or greater
Q	3,4 mm	V	Bugle head, metal connector, ring shank, 34 degree	62	115mm	33			U	Stainless steel, AISI 316 (A4)
R	1,6 mm	W	L cleat head, barded shank	63	120mm	34			X	Xtra heavy electro galvanized 12 micron
T	4,6 mm	X	Medium head pin	64	125mm	35			Z	Bronze
U	2,0 mm	Y	Slight head pin	65	130mm	36				
V	2,6 mm	Z	Headless pin	66	135mm	37				
1	2,8 mm	5	Offset full round head, smooth	67	140mm	38				
2	4,5mm	6	Offset full round head, ring	68	145mm	39				
				69	150mm	40				
				70	160mm	41				

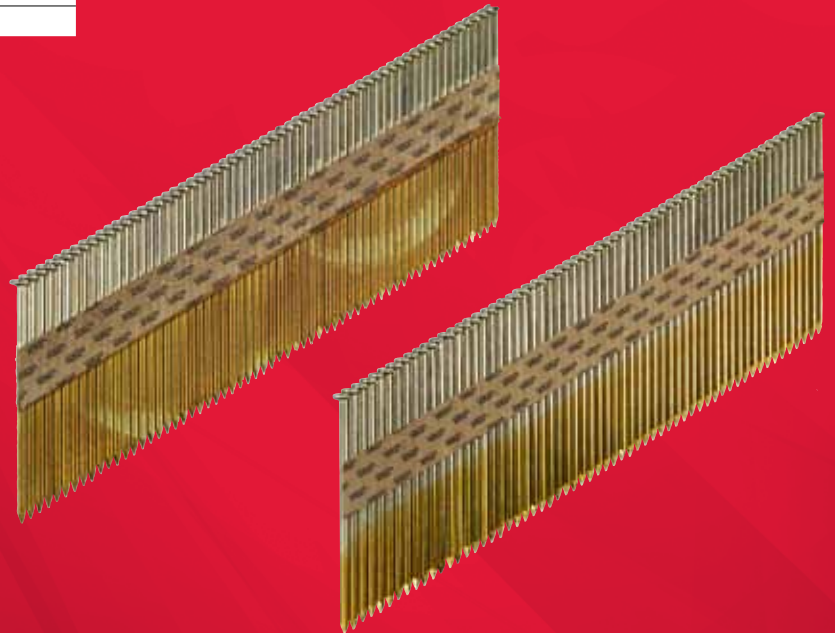

EXAMPLE: **GC51ASBK R**

1 2 3 4 5 6 7 8 9

1	G	2,87 mm	2	C	Flat head, smooth for clipped head stripnails	3 4	51	50mm	21	5	A	Diamond	6	S	Hot-dipped galvanised - corrosivity class 3
---	---	---------	---	---	---	-----	----	------	----	---	---	---------	---	---	---




7TH DIGIT FINISH	
A	Plain
B	Sencoted
C	Painted
D	Painted / sencoted
E	Coated by vendor
S	New glue

8TH DIGIT FEATURES	
E	24 Degree strip angle
K	Short strip
L	Plastic collation strip with 7,5mm pitch
M	Full round head nail, plastic collated 34 degree
N	Carton / label / count change
P	Bulk pack
R	Retail packaging
S	Full round head, plastic collated 20 degree angled
T	Full round head nail, paper collated 20 degree angled metal connector
X	Half strips - retail packaging
4	17 Degree strip angle

9TH DIGIT SOURCE AND SPECIAL FEATURES	
G	Stainless steel welding wire
K	Short strip
R	Retail packaging
W	Waterproof packaging

10TH DIGIT OTHER	
-FC	Fuel cell
R	Retail packaging

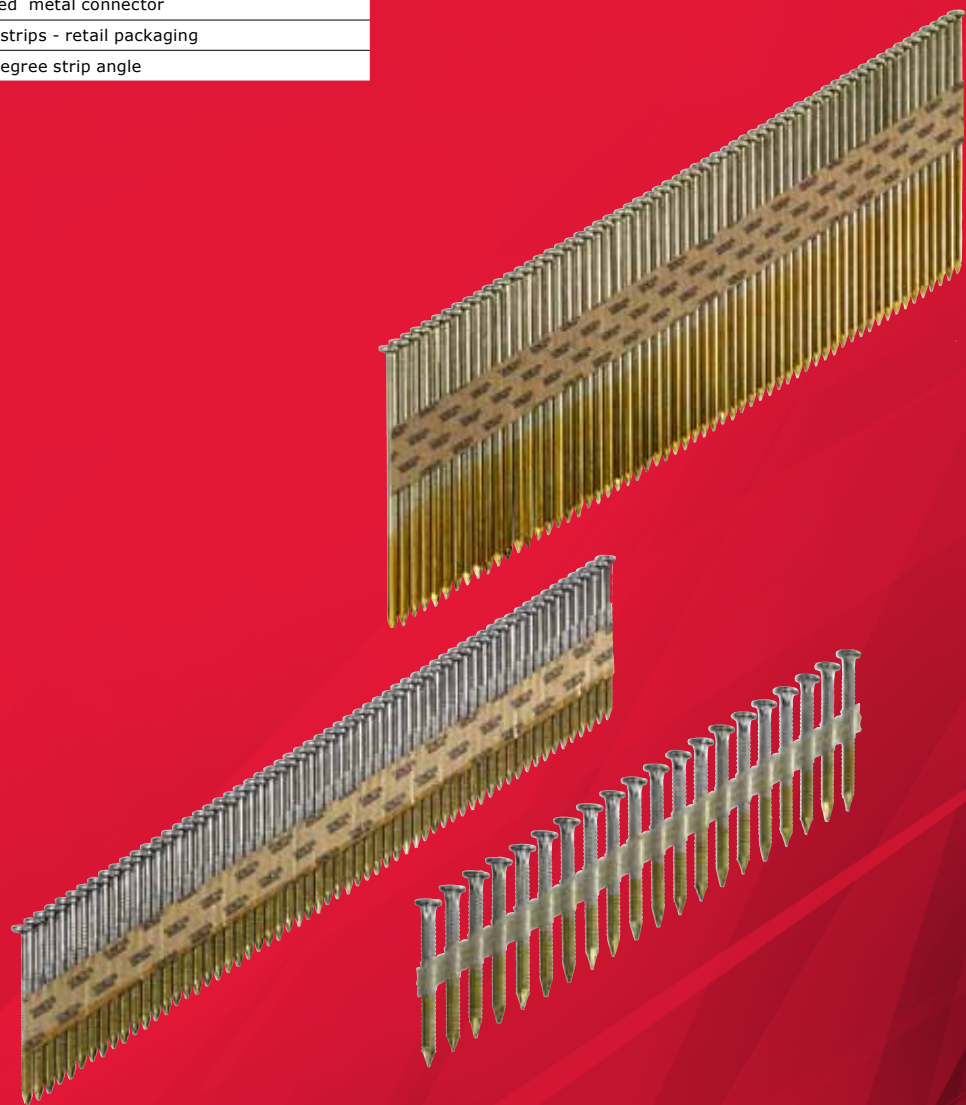

7	
B	Sencoted


8	
K	Short strip

9	
R	Retail packaging

USE SENCO FASTENERS

COILNAIL CODING CHART

1ST DIGIT GAUGE & DIA (MM)		2ND DIGIT HEAD/SHANK CONFIGURATION		3RD & 4TH DIGITS LENGTH		5TH DIGIT POINT		6TH DIGIT WIRE CHEMISTRY & FINISH	
B	2,5 mm	B	Flat head, barbed for conical and flat coils	02	27mm	A	Diamond	A	Regular galvanised std tensile
D	1,8 mm	C	Flat head, smooth for conical coils	03	30mm	B	Blunt dia	C	Liquor finish
E	2,3 mm	D	Flat head, smooth for flat coils	10	16mm	C	Blunt	D	"Wheatherex II" galvanised
F	2,46 mm	E	Flat head, ring for conical coils	11	19mm	D	Blunt chisel	G	Stainless steel, AISI 304 (A2)
G	2,87 mm	F	Flat head, screw for conical nails	12	22mm	E	Sharp chisel	H	Bright basic, heat-treated
H	3,1 mm	G	Cupped head, ring shank, drywall for flat coils	13	25mm	F	Chisel	I	Regular galvanised, heat-treated
K	3,3 mm	J	Flat head, smooth for flat coils (only for 2,5 regular nails and 3,1 roofing nails)	14	28mm	G	Semi-blunt	J	Hot-dipped galvanised - corrosivity class 2
M	3,8 mm	K	Flat head, screw for flat coils	15	32mm	H	Clinch point	K	Hot-dipped galvanised - corrosivity class 4
P	2,2 mm	L	Flat head, ring for flat coils	16	35mm			M	Aluminium
Q	3,4 mm	R	Duplex head	17	38mm			P	Bright basic, std tensile
R	1,6 mm	S	Dome head, ring for conical and flat coils	18	40mm			R	Regular galvanised, yellow chromated
S	2,1 mm	SD	Dome head, smooth for conical and flat coils	19	45mm			S	Hot-dipped galvanised
T	4,6 mm	SK	Dome head, screw for conical and flat coils	21	50mm			T	"Flash" galvanised or greater
U	2,03 mm	X	Knurled	22	55mm			U	Stainless steel, AISI 316 (A4)
V	2,6 mm			24	60mm			X	Xtra heavy electro galvanized 12 micron
1	2,8 mm			25	65mm			Z	Bronze
				26	70mm				
				27	75mm				
				28	80mm				
				85	85mm				
				29	90mm				
				30	95mm				
				31	100mm				
				32	110mm				
				33	115mm				
				34	120mm				
				35	125mm				
				36	130mm				
				37	135mm				
				38	140mm				
				39	145mm				
				40	150mm				
				41	160mm				

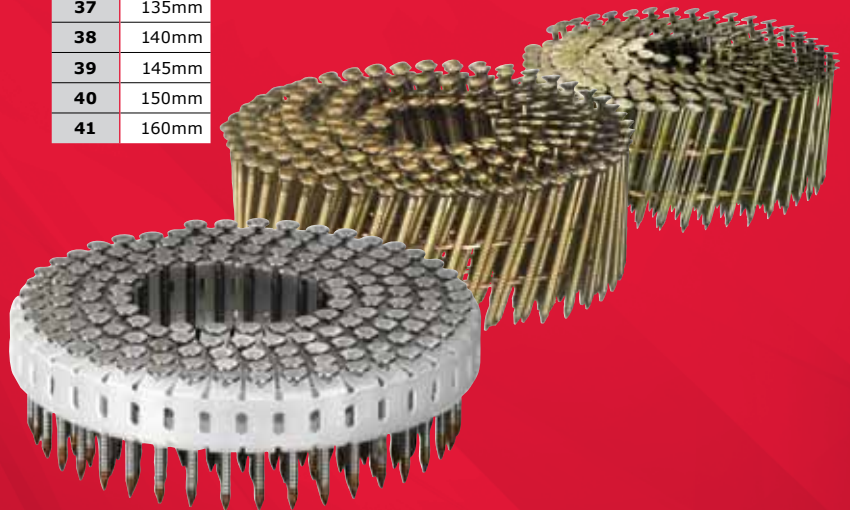

EXAMPLE: **SE21ABV**

1 2 3 4 5 6 7 8

1	S	2,1 mm	2	E	Flat head, ring for conical coils	3 4	21	50mm	5	A	Diamond	6	A	Regular galvanised std tensile
---	---	--------	---	---	-----------------------------------	-----	----	------	---	---	---------	---	---	--------------------------------



SENCO[®]

7TH DIGIT
FINISH

A	Plain
B	Sencoted
C	Painted
D	Painted / sencoted
E	Coated by Verdor

8TH DIGIT
FEATURES

A	Coil, flat wound, angular collation, wire, 6,0mm nail spacing
B	Coil, flat wound, straight collation plastic carrier strip (normal 16mm wide)
C	Coil, flat wound, angular collation, plastic carrier strip (normal 16mm wide)
E	Coil, flat wound, angular collation, wire, 10.5mm nail spacing
F	Coil, flat wound, angular collation, wire, 8,2mm nail spacing
G	Coil, flat wound, straight collation, wire
H	Coil, flat wound, angular collation, wire, 7,0 mm nail spacing
R	Retail packaging
V	Coil, conical wound, angular collation, wire, 6,0mm nailspacing (8mm for HJ-nails)
W	Coil, conical wound, straight collation, wire, 8,2mm nail spacing
Z	Coil, conical wound, straight collation, wire, 5,5mm & 6,5 mm nail spacing
9	Coil, flat wound, straight collation, plastic carrier strip (small 9mm)

9TH DIGIT
SOURCE

G	Stainless steel welding wire
I	Special leg feature
J	Jumbo coil 1000 nails
N	Carton / label / count change
P	High load
R	Retail packaging
S	Small plastic carrier strip, 9mm wide
D/F	Plastic collation 0 degree
9	Coil, flat wound, straight collation, plastic carrier strip (small 9mm)

10TH DIGIT
SOURCE

J	Jumbo coil 1000 nails
N	Carton / label / count change
P	High load
R	Retail packaging
S	Small plastic carrier strip, 9mm wide



7	B	Sencoted
----------	----------	----------

8	V	Coil, conical wound, angular collation, wire, 6,0mm nailspacing (8mm for HJ-nails)
----------	----------	--

USE SENCO FASTENERS

The DuraSpin Collated Screw Fastening System Family is the professionals choice for demanding steel framing, drywall and wood fastening applications. The perfect solution for high productivity crews as well as a single man operation. Like having an extra hand, Senco DuraSpin will dramatically increase your productivity.



SENCO[®]



DURASPIN

Collated screw
fastening systems

1
YEAR
LIMITED
WARRANTY

**DURA
SPIN**

USE SENCOTOLS

COLLATED SCREW SYSTEMS

HEAVY DUTY MACHINE DS5525-18V



TECHNICAL INFORMATION

LxWxH	381x86x241 mm
Weight	2,6 kg
RPM	2500
Torque	8Nm
Magazine capacity	50
Max. screw length	55mm
Battery	18V 3Ah Li-ion
Screw per charge	up to 1400
Recharge time	1 hour

APPLICATIONS

Drywall to wood or steel studs, sub-floor, cement board, underlayment, sheathing to steel, metal framing

FEATURES

- 2500 RPM high torque motor
- Patent pending corner-fit system
- Tool-free screw length adjustment
- Precise depth-of-drive adjustment with depth lock
- Quick slide button bit change

DESCRIPTION	ART. NR
DS5525-18V EU	7X2001N
DS5525-18V UK	7X7001N



* 13-50 mm screws require special nosepiece

HEAVY DUTY MACHINE DS5525-AC



TECHNICAL INFORMATION

LxWxH	425x70x233 mm
Weight	2,1 kg
RPM	2500
Torque	11Nm
Magazine capacity	50
Max. screw length	55mm


APPLICATIONS

Drywall to wood or steel studs, sub-floor, cement board, underlayment, sheathing to steel, metal framing

FEATURES

- 2500 RPM high torque motor
- Patent pending corner-fit system
- Tool-free screw length adjustment
- Precise depth-of-drive adjustment with depth lock
- Quick slide button bit change

DESCRIPTION	ART. NR
DS5525-AC EU	7U2001N
DS5525-AC UK (230V)	7U7001N
DS5525-AC UK (110V)	7U7002N



* 13-50 mm screws require special nosepiece

HIGH SPEED MACHINE DS5550-18V



TECHNICAL INFORMATION

LxWxH	381x86x241 mm
Weight	2,6 kg
RPM	5000
Torque	5Nm
Magazine capacity	50
Max. screw length	55mm
Battery	18V 3Ah Li-ion
Screw per charge	up to 1400
Recharge time	1 hour


APPLICATIONS

Drywall to wood or steel studs, subfloor, sheathing, cement board, underlayment

FEATURES

- 5000 RPM high speed motor
- Patent pending corner-fit system
- Tool-free screw length adjustment
- Precise depth-of-drive adjustment with depth lock
- Quick slide button bit change

DESCRIPTION	ART. NR
DS5550-18V EU	7W2001N
DS5550-18V UK	7W7001N



* 13-50 mm screws require special nosepiece



SENCO®

HIGH SPEED MACHINE DS5550-AC

NEW



INCLUDES CASE



TECHNICAL INFORMATION

LxWxH	425x70x233 mm
Weight	2,1 kg
RPM	5000
Torque	7Nm
Magazine capacity	50
Max. screw length	55mm


APPLICATIONS

Drywall to wood or steel studs, subfloor, sheathing, cement board, underlayment

FEATURES

- 5000 RPM high speed motor
- Patent pending corner-fit system
- Tool-free screw length adjustment
- Precise depth-of-drive adjustment with depth lock
- Quick slide button bit change

DESCRIPTION	ART.NR
DS5550-AC EU	7T2001N
DS5550-AC UK (230V)	7T7001N
DS5550-AC UK (110V)	7T7002N



* 13-50 mm screws require special nosepiece

MULTI PURPOSE MACHINE DS7525-18V

NEW



INCLUDES CASE



TECHNICAL INFORMATION

LxWxH	394x86x241 mm
Weight	2,7 kg
RPM	2500
Torque	8Nm
Magazine capacity	50
Max. screw length	75mm
Battery	18V 3Ah Li-ion
Screw per charge	up to 1400
Recharge time	1 hour

APPLICATIONS

Drywall to wood or steel studs, subfloor, cement board, underlayment, sheathing to steel, metal framing

FEATURES

- 2500 RPM high torque motor
- Patent pending corner-fit system
- Patented sliding screw guide
- Tool-free screw length adjustment
- Precise depth-of-drive adjustment with depth lock

DESCRIPTION	ART.NR
DS7525-18V EU	7Y2001N
DS7525-18V UK	7Y7001N



MULTI PURPOSE MACHINE DS7525-AC

NEW



INCLUDES CASE



TECHNICAL INFORMATION

LxWxH	438x70x233 mm
Weight	2,2 kg
RPM	2500
Torque	11Nm
Magazine capacity	50
Max. screw length	75mm


APPLICATIONS

Drywall to wood or steel studs, subfloor, cement board, underlayment, sheathing to steel, metal framing

FEATURES

- 2500 RPM high torque motor
- Patent pending corner-fit system
- Patented sliding screw guide
- Tool-free screw length adjustment
- Precise depth-of-drive adjustment with depth lock

DESCRIPTION	ART.NR
DS7525-AC EU	7V2001N
DS7525-AC UK (230V)	7V7001N
DS7525-AC UK (110V)	7V7002N



COLLATED SCREW SYSTEMS & ACCESSORIES

EASY DRIVER SCREW SYSTEM DS300-AC



TECHNICAL INFORMATION

LxWxH	800-1054x109x175 mm
Weight	3,9 kg
RPM	3300
Torque	6Nm
Magazine capacity	50
Max. screw length	75mm


APPLICATIONS

Decking, subfloors

FEATURES

- Depth adjustment allows precise countersinking of screws
- Trigger lock
- Height adjustable handle
- Patented clutch design for long-lasting durability

DESCRIPTION	ART. NR
DS300-AC EU (230V)	1P2001N
DS300-AC UK (230V)	1P7001N
DS300-AC UK (110V)	1P7002N



ROOFING SCREW SYSTEM DS300-AC



TECHNICAL INFORMATION

LxWxH	800-1054x109x175 mm
Weight	3,9 kg
RPM	3300
Torque	6Nm
Magazine capacity	50
Max. screw length	75mm


APPLICATIONS

Specially designed for roofing application

FEATURES

- Specifically designed for roofing
- Adjustable depth of drive
- Height adjustable handle
- Trigger lock
- Patented clutch design for long-lasting durability

DESCRIPTION	ART. NR
DS300-AC roofing (230V)	1P2001NX



DURASPIN BATTERIES



DESCRIPTION	ART. NR.
Duraspin battery 18V Li-ion 1,5 Ah	VB0160EU
Duraspin battery 18V Li-ion 3,0 Ah	VB0162EU

DURASPIN CHARGERS



DESCRIPTION	ART. NR.
Battery charger 18V EU	VB0157
Battery charger 18V UK	VB0159

NOSE PIECES



DESCRIPTION	ART.NR.
Nose piece for drywall	
DS5525/DS5550	FC0886EU
DS7525	FC0906EU



DESCRIPTION	ART.NR.
Nose piece for wood	
DS5525/DS5550	FB0162EU
DS7525	FB0160EU



SENCO[®]

**DRIVE BITS IN
BLISTERPACK**



DESCRIPTION **ART.NR.**

BITS FOR DS5525, DS5550

Screw bit PH2	EA0326B
Screw bit SQ2	EA0327B
Screw bit PZ2	EA0335B*
Screw bit TX20	EA0336B*
Screw bit Senco drive	EA0333B*

BITS FOR DS7525

Screw bit PH2	EA0329B
Screw bit SQ2	EA0330B
Screw bit PZ2	EA0337B*
Screw bit TX20	EA0338B*
Screw bit Senco drive	EA0334B*

BITS FOR DS300AC

Screw bit PH2	EAP27530B
Screw bit SQ2	EAS27530B
Screw bit PZ2	EAPZ27530
Screw bit Senco drive	EA0127TB


* article could have longer delivery time




COLLATED SCREWS

INDEX


SCREW HEAD




SCREW POINT



RECESS



SCREW THREAD




MATERIAL/ FINISH

- Phosphate
- Clear zinc
- Yellow zinc
- Green ruspert II
- Stainless Steel
- Weatherex II

Items marked * could have a longer lead time.



DRYWALL TO WOOD







SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
3,9 x 25mm	Phosphate	8,00-8,50	39A25MP
3,9 x 30mm	Phosphate	8,00-8,50	39A30MP
3,9 x 35mm	Phosphate	8,00-8,50	39A35MP
3,9 x 41mm	Phosphate	8,00-8,50	39A41MP *
3,9 x 45mm	Phosphate	8,00-8,50	39A45MP
3,9 x 50mm	Phosphate	8,00-8,50	39A50MP
3,9 x 55mm	Phosphate	8,00-8,50	39A55MP
4,5 x 75mm	Phosphate	8,00-8,50	45A75MP
3,9 x 32mm	Clear Zinc	8,00-8,50	39A32MC-5
3,9 x 35mm	Clear Zinc	8,00-8,50	39A35MC-5 *
3,9 x 42mm	Clear Zinc	8,00-8,50	39A42MC-5
3,9 x 55mm	Clear Zinc	8,00-8,50	39A55MC-5 *








SENCO®

DRYWALL TO WOOD






SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
○ 3,9 x 30mm	Clear Zinc	8,00-8,50	39N30MC-5
○ 3,9 x 42mm	Clear Zinc	8,00-8,50	39N42MC-5 *
○ 3,9 x 55mm	Clear Zinc	8,00-8,50	39N55MC-5 *

DRYWALL TO LIGHT STEEL (UP TO 1MM)






SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
○ 3,5 x 35mm	Phosphate	8,00-8,50	35B35MP
○ 3,5 x 45mm	Phosphate	8,00-8,50	35B45MP
○ 3,9 x 25mm	Phosphate	8,00-8,50	39B25MP
○ 3,9 x 35mm	Phosphate	8,00-8,50	39B35MP
○ 3,9 x 45mm	Phosphate	8,00-8,50	39B45MP
○ 3,9 x 55mm	Phosphate	8,00-8,50	39B55MP *

DRYWALL TO WOOD OR LIGHT STEEL (UP TO 1MM)








SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
○ 3,9 x 30mm	Clear Zinc	6,00-6,50	39T30MC-5 *
○ 3,9 x 40mm	Clear Zinc	6,00-6,50	39T40MC-5 *
○ 3,9 x 50mm	Clear Zinc	6,00-6,50	39T50MC-5 *

DRYWALL TO HEAVY STEEL (UP TO 3MM)



SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
○ 3,5 x 25mm	Phosphate	8,00-8,47	35Q25MP *
○ 3,5 x 35mm	Phosphate	8,00-8,48	35Q35MP *
○ 3,5 x 40mm	Phosphate	8,00-8,49	35Q40MP *
○ 3,5 x 45mm	Phosphate	8,00-8,50	35Q45MP *
○ 3,5 x 25mm	Clear Zinc	8,00-8,50	35Q25MC-5
○ 3,5 x 35mm	Clear Zinc	8,00-8,50	35Q35MC-5
○ 3,5 x 40mm	Clear Zinc	8,00-8,50	35Q40MC-5 *
○ 3,5 x 45mm	Clear Zinc	8,00-8,50	35Q45MC-5

DRYWALL TO LIGHT STEEL (UP TO 1MM)







SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
○ 3,5 x 25mm	Clear Zinc	8,00-8,50	35P25MC-5 *
○ 3,5 x 40mm	Clear Zinc	8,00-8,50	35P40MC-5

USE SENCOS FASTENERS





COLLATED SCREWS

DRYWALL TO WOOD OR LIGHT STEEL (UP TO 1MM)







SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
● 3,9 x 25mm	Phosphate	8,00-8,45	39S25MP *
● 3,9 x 35mm	Phosphate	8,00-8,50	39S35MP *
● 3,9 x 40mm	Phosphate	8,00-8,47	39S40MP *
● 3,9 x 45mm	Phosphate	8,00-8,48	39S45MP *
● 3,9 x 55mm	Phosphate	8,00-8,48	39S55MP *
○ 3,9 x 25mm	Clear Zinc	8,00-8,50	39S25MC-5 *
○ 3,9 x 30mm	Clear Zinc	8,00-8,50	39S30MC-5 *
○ 3,9 x 32mm	Clear Zinc	8,00-8,50	39S32MC-5
○ 3,9 x 35mm	Clear Zinc	8,00-8,50	39S35MC-5
○ 3,9 x 40mm	Clear Zinc	8,00-8,50	39S40MC-5 *
○ 3,9 x 42mm	Clear Zinc	8,00-8,50	39S42MC-5
○ 3,9 x 50mm	Clear Zinc	8,00-8,50	39S50MC-5 *

GYPSUM FIBER BOARD TO WOOD OR LIGHT STEEL (UP TO 1MM)






SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
○ 3,9 x 30mm	Clear Zinc	6,00-6,50	39U30MC-5 *
○ 3,9 x 40mm	Clear Zinc	6,00-6,50	39U40MC-5 *
○ 3,9 x 50mm	Clear Zinc	6,00-6,50	39U50MC-5 *

HARD FIBER TO WOOD OR LIGHT STEEL (UP TO 1MM)








SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
○ 3,9 x 30mm	Clear Zinc	6,70-7,00	39JS30MC *
○ 3,9 x 45mm	Clear Zinc	6,70-7,00	39JS45MC *

GYPSUM FIBER BOARD TO LIGHT STEEL (UP TO 1MM)




SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
● 3,9 x 30mm	Phosphate	6,70-7,00	39J30MP
● 3,9 x 45mm	Phosphate	6,70-7,00	39J45MP

HARD FIBER BOARD TO LIGHT STEEL (UP TO 1MM)



SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
● 4,2 x 35mm	Phosphate	7,40-7,80	42UM35MP *
● 4,2 x 38mm	Phosphate	7,40-7,80	42UM38MP

GENERAL WOOD TO WOOD




SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
○ 4,0 x 25mm	Clear Zinc	8,00-8,50	40K25MC *
○ 4,0 x 30mm	Clear Zinc	8,00-8,50	40K30MC *
○ 4,0 x 35mm	Clear Zinc	8,00-8,50	40K35MC *
○ 4,0 x 40mm	Clear Zinc	8,00-8,50	40K40MC *
○ 4,0 x 45mm	Clear Zinc	8,00-8,50	40K45MC *
○ 4,0 x 50mm	Clear Zinc	8,00-8,50	40K50MC *
○ 4,0 x 55mm	Clear Zinc	8,00-8,50	40K55MC *
○ 4,0 x 60mm	Clear Zinc	8,00-8,50	40K60MC *
○ 4,2 x 25mm	Yellow Zinc	8,00-8,50	42K25MY
○ 4,2 x 30mm	Yellow Zinc	8,00-8,50	42K30MY
○ 4,2 x 35mm	Yellow Zinc	8,00-8,50	42K35MY
○ 4,2 x 45mm	Yellow Zinc	8,00-8,50	42K45MY

FLOORING WOOD TO WOOD (CHIPBOARD)




SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
○ 4,0 x 25mm	Clear Zinc	8,00-8,50	40H25MC *
○ 4,0 x 30mm	Clear Zinc	8,00-8,50	40H30MC *
○ 4,0 x 35mm	Clear Zinc	8,00-8,50	40H35MC
○ 4,0 x 40mm	Clear Zinc	8,00-8,50	40H40MC
○ 4,0 x 45mm	Clear Zinc	8,00-8,50	40H45MC *
○ 4,0 x 50mm	Clear Zinc	8,00-8,50	40H50MC *
○ 4,0 x 55mm	Clear Zinc	8,00-8,50	40H55MC *
○ 4,0 x 60mm	Clear Zinc	8,00-8,50	40H60MC *
○ 4,2 x 25mm	Yellow Zinc	8,00-8,50	42H25MY *
○ 4,2 x 30mm	Yellow Zinc	8,00-8,50	42H30MY *
○ 4,2 x 35mm	Yellow Zinc	8,00-8,50	42H35MY *
○ 4,2 x 45mm	Yellow Zinc	8,00-8,50	42H45MY *

WOOD TO WOOD (CHIPBOARD)



SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
○ 4,2 x 35mm	Yellow Zinc	8,00-8,50	42KS35MY *
○ 4,2 x 40mm	Yellow Zinc	8,00-8,50	42KS40MY *
○ 4,2 x 45mm	Yellow Zinc	8,00-8,50	42KS45MY *
○ 4,2 x 50mm	Yellow Zinc	8,00-8,50	42KS50MY *






FLOORING WOOD TO WOOD



SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
○ 4,5 x 75mm	Yellow Zinc	8,00-8,50	45F75MY





COLLATED SCREWS

FLOORING WOOD TO WOOD








SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
4,5 x 60mm	Yellow Zinc	8,00-8,50	45X60MY
4,5 x 65mm	Yellow Zinc	8,00-8,50	45X65MY *
4,5 x 70mm	Yellow Zinc	8,00-8,50	45X70MY *

FLOORING WOOD TO WOOD








SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
4,2 x 35mm	Yellow Zinc	7,00-7,50	42Z35MY *
4,2 x 45mm	Yellow Zinc	7,00-7,50	42Z45MY *
4,2 x 55mm	Yellow Zinc	7,00-7,50	42Z55MY

FLOORING WOOD TO WOOD (MEDIUM)



SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
4,2 x 25mm	Yellow Zinc	7,00-7,50	42R25MY *
4,2 x 35mm	Yellow Zinc	7,00-7,50	42R35MY *
4,2 x 40mm	Yellow Zinc	7,00-7,50	42R40MY *
4,2 x 45mm	Yellow Zinc	7,00-7,50	42R45MY
4,2 x 50mm	Yellow Zinc	7,00-7,50	42R50MY
4,2 x 55mm	Yellow Zinc	7,00-7,50	42R55MY *
4,5 x 75mm	Yellow Zinc	7,00-7,50	45R75MY *
4,2 x 40mm	Ruspurt II	7,00-7,50	42R40MR *
4,2 x 50mm	Ruspurt II	7,00-7,50	42R50MR *
4,2 x 55mm	Ruspurt II	7,00-7,50	42R55MR *
4,5 x 50mm	Ruspurt II	7,00-7,50	45R50MR *
4,5 x 55mm	Ruspurt II	7,00-7,50	45R55MR *
4,2 x 50mm	Stainless Steel	7,00-7,50	42R50MS *
4,2 x 55mm	Stainless Steel	7,00-7,50	42R55MS *
4,2 x 45mm	Weatherex II	7,00-7,50	42R45MW *
4,5 x 65mm	Weatherex II	7,00-7,50	45R65MW *

FLOORING WOOD TO WOOD





SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
4,2 x 35mm	Yellow Zinc	7,00-7,50	42RH35MY *
4,2 x 40mm	Yellow Zinc	7,00-7,50	42RH40MY *
4,2 x 45mm	Yellow Zinc	7,00-7,50	42RH45MY
4,2 x 50mm	Yellow Zinc	7,00-7,50	42RH50MY *
4,2 x 55mm	Yellow Zinc	7,00-7,50	42RH55MY *
4,5 x 65mm	Yellow Zinc	7,00-7,50	45RH65MY *
4,5 x 75mm	Yellow Zinc	7,00-7,50	45RH75MY *
4,2 x 40mm	Ruspurt II	7,00-7,50	42RH40MR *
4,2 x 50mm	Ruspurt II	7,00-7,50	42RH50MR *
4,2 x 55mm	Ruspurt II	7,00-7,50	42RH55MR *
4,5 x 65mm	Ruspurt II	7,00-7,50	45RH65MR *
4,5 x 75mm	Ruspurt II	7,00-7,50	45RH75MR *
4,2 x 35mm	Stainless Steel	7,00-7,50	42RH35MS *
4,2 x 40mm	Stainless Steel	7,00-7,50	42RH40MS *
4,2 x 45mm	Stainless Steel	7,00-7,50	42RH45MS *
4,2 x 50mm	Stainless Steel	7,00-7,50	42RH50MS *
4,2 x 55mm	Stainless Steel	7,00-7,50	42RH55MS
4,5 x 75mm	Stainless Steel	7,00-7,50	45RH75MS *





SENCO[®]

DECKING WOOD TO WOOD





SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
○ 4,5 x 50mm	Stainless Steel	8,00-8,50	45D50MSA *
○ 4,5 x 65mm	Stainless Steel	8,00-8,50	45D65MSA
○ 4,5 x 75mm	Stainless Steel	8,00-8,50	45D75MSA *

FLOORING/DECKING WOOD TO WOOD (SOFT)





SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
○ 4,2 x 35mm	Yellow Zinc	8,00-8,50	42Y35MY *
○ 4,2 x 40mm	Yellow Zinc	8,00-8,50	42Y40MY *
○ 4,2 x 50mm	Yellow Zinc	8,00-8,50	42Y50MY *
○ 4,2 x 55mm	Yellow Zinc	8,00-8,50	42Y55MY

FLOORING/DECKING WOOD TO WOOD (SOFT)




SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
● 4,2 x 50mm	Weatherex II	8,00-8,50	42W50MW
● 4,2 x 55mm	Weatherex II	8,00-8,50	42W55MW
● 4,5 x 65mm	Weatherex II	8,00-8,50	45W65MW
● 4,5 x 75mm	Weatherex II	8,00-8,50	45W75MW
○ 4,2 x 50mm	Yellow Zinc	8,00-8,50	42W50MY
○ 4,2 x 55mm	Yellow Zinc	8,00-8,50	42W55MY
○ 4,5 x 65mm	Yellow Zinc	8,00-8,50	45W65MY
○ 4,5 x 75mm	Yellow Zinc	8,00-8,50	45W75MY

STEEL TO STEEL (UP TO 3 OR 4,4MM)



SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
○ 4,2 x 13mm	Clear Zinc	7,77-8,18	42OP13MC
○ 4,2 x 16mm	Clear Zinc	7,77-8,18	42OP16MC
○ 4,2 x 19mm	Clear Zinc	7,77-8,18	42OP19MC *

WOOD TO HEAVY STEEL (UP TO 3MM)



SIZE	MATERIAL/FINISH	HEAD Ø	ART.NR.
○ 4,2 x 35mm	Clear Zinc	8,00-8,50	42GS35MC *
○ 4,2 x 41mm	Clear Zinc	8,00-8,50	42GS41MC
○ 4,2 x 65mm	Clear Zinc	8,00-8,50	42GS65MC *

USE SENCOS FASTENERS



SENCO[®]

- | | | | |
|----|---------------------|----|-------------------------------|
| 1 | Aerfast | 14 | Ottensten Polska |
| 2 | Afcom Group | 15 | Ottensten Ukraine |
| 3 | Affut Precis Maroc | 16 | Poppers Senco Deutschland |
| 4 | Betis Distribution | 17 | Poppers Senco Ireland |
| 5 | Bin Khalaf Group | 18 | Poppers Senco Makine |
| 6 | Cerclindus | 19 | Poppers Senco Nederland |
| 7 | H. Clausen | 20 | Poppers Senco UK |
| 8 | Heinz Bühnen | 21 | Romeo Maestri & Figli |
| 9 | J.P. Müller | 22 | Sofragraf Senco |
| 10 | Mechelin | 23 | Technical Supplies & Services |
| 11 | Ottensten Denmark | 24 | Vamvacas |
| 12 | Ottensten Latvia | 24 | Y.Kawoosh |
| 13 | Ottensten Lithuania | | |

FOR MORE INFORMATION:

WWW.SENCO-EMEA.COM

USE SENCO

INDEX

DESCRIPTION	PAGE	DESCRIPTION	PAGE	DESCRIPTION	PAGE
ACCESSORIES				DRILLS AND SCREWDRIVERS	
Air accessorie kit	61	DS5525-AC Heavy Duty machine	94	SEN510C Drill	38
Airblow gun	61	DS5550-18V High Speed machine	94	SEN511C Drill	38
Collated screw system accessories	96-97	DS5550-AC High Speed machine	95	SEN600C Screwdriver	39
Compressor oil	63	DS7525-18V Multi Purpose machine	95	SEN602C Screwdriver	39
Couplings	62	DS7525-AC Multi Purpose machine	95	SEN610C Screwdriver	40
Gas tool accessories	70-71	COMPRESSORS		SEN611C Screwdriver	40
Hose clamp	61	Compressor kit 3 in 1 set	60	SEN612C Screwdriver	40
Hoses	61-62	Compressor kit PC1010	60	SEN700C Impact driver	41
Lubricants	62-63	Compressor kit PC1010 /SLS18Mg	60	FASTENERS	
Plugs	61	Compressor kit PC1010/FinishPro18Mg	60	CE/Index	74-75
Safety glasses	63	PC0968 Mini compressor	56	Coding chart	86-91
Service repair kits	63	PC1010 Mini compressor	56	Coilnails	80-83
Spring balancer	62	PC1246 Maxi compressor	58	Collated screws	98-103
Staple remover	63	PC1248 Mini compressor	56	Pins and brads / others	84-85
Teflon tape	62	PC1249 Midi compressor	57	Staples	76-78
		PC1250 Midi compressor	57	Stripnails	78-79
COILNAILERS		PC1251 Maxi compressor	58		
CoilPro50 Coilnailer	31	PC1252 Midi compressor	57	STAPLERS	
PAL50 Coilnailer	44	PC1286EU High pressure compressor	59	S150LS Medium wire stapler	50
PAL57F Coilnailer	44	PC1287EU Kit compressor	59	SFT10XP Light wire stapler	10
PAL70 Coilnailer	44	PC2225 Maxi compressor	58	SFT10XP-DL Light wire stapler	10
PAL70 Duplex Coilnailer	45	CONCRETE NAILERS		SFT10XP-LN Light wire stapler	11
PAL83 Coilnailer	46	SAP40XP Concrete nailer	18	SFW05 Light wire stapler	50
PAL90 Coilnailer	46	SGP40S Concrete nailer	70	SFW09 Light wire stapler	24
PAL100 Coilnailer	47	CORDLESS		SHS50XP Heavy wire stapler	12
PAL130 Coilnailer	47	F-15 Fusion Finish nailer 1,8mm	66	SHS51XP Heavy wire stapler	12
ROOFPRO455XP Coilnailer	18	F-16A Fusion Finish nailer 1,6mm	66	SKSXP Medium wire stapler	12
S65CNP Coilnailer	52	F-16S Fusion Finish nailer 1,6mm	66	SLS18Mg Medium wire stapler	24
SCN30 Coilnailer	30	F-18 Fusion Brad nailer 1,2mm	67	SLS20XP Medium wire stapler	11
SCN34 Coilnailer	31	GT50AX Brad nailer 1,2mm	68	SLS25XP Medium wire stapler	11
SCN49 Coilnailer	31	GT60NN Metal connector	70	SNS41 Heavy wire stapler	25
SCN58A Coilnailer	32	GT65DA Finish nailer	69	SNS50XP Heavy wire stapler	13
SCN650 Coilnailer	32	GT65RHA Brad nailer 1,6mm	68	SNS50XP Wegmatic	20
SCN65XP Coilnailer	18	GT65RHS Brad nailer 1,6mm	68	SQS55XP Heavy wire stapler	13
SCN75 Coilnailer	32	GT90CH CH Framing nailer	69	SQS55XP Wegmatic	20
SCN90 Coilnailer	33	GT90FRH FRH Framing nailer	69	WC150XP Wide crown stapler	14
COLLATED SCREW SYSTEM		SGP40S Concrete nailer	70	WC200XP Wide crown stapler	14
DS300-AC Easy driver screw system	97			WC330-SP Wide crown stapler	25
DS300-AC Roofing screw system	97			WC360-SP Wide crown stapler	25
DS5525-18V Heavy Duty machine	94				



INDEX

DESCRIPTION	PAGE	DESCRIPTION	PAGE
SPECIALITY TOOLS			
A20 Palm hand nailer	36	SN1302 Full round head nailer 130mm	30
AnchorPro60 Metal connector	34	SN1602 Full round head nailer 160mm	30
BC58 Button cap stapler	35		
DFPXP Plier tool	20		
FAT25 Plier tool	21		
F75LXP Plier tool	21		
F75SXP Plier tool	21		
MC60-34 Metal connector	34		
SC1XP Senclamp fastener	19		
SC15 Corrugated fastener 15mm	34		
SC25 Corrugated fastener 20mm	35		
SCCM Manual carton closer	36		
SCCP Carton closer	37		
SHT-F Hammertacker	36		
SRCC Carton closer	37		
STN64 T-nailer	35		
STRIPNAILERS			
A900FN Clipped head framing nailer	52		
FinishPro10 Micropinner 0,6mm	26		
FinishPro18 Mg Brad nailer 1,2mm	26		
FinishPro25XP Brad nailer 1,2mm	15		
FinishPro32 Brad nailer 1,6mm	26		
FinishPro35Mg Finish nailer	27		
FinishPro42XP Finish nailer	16		
FramePro601 Clipped head nailer	28		
FramePro602 Full round head nailer	29		
FramePro651 Clipped head nailer	28		
FramePro652 Clipped head nailer	29		
S200BN Brad nailer	50		
S200SM Brad nailer	51		
S250SM Brad nailer	51		
S250FN Brad nailer	51		
SBN10XP Brad nailer 1,2mm	15		
SFN30 Finish nailer	27		
SidingPro40 Clipped head nailer	28		
SLP20XP Brad nailer 1,2mm	14		
SLP20XP GLN Brad nailer 1,2mm	15		
SN901XP Clipped head 50-90mm	16		
SN951XP Clipped head 50-100mm	16		
SN952XP Full round head 50-90mm	17		



© Copyright Verpa Senco BV 2014.
All rights reserved; No rights may be
derived from the information in this
publication.

USE SENCO

