



SENCO[®]

PERFORMANCE. POWER.
PRODUCTIVITY.

CORDLESS

**SENCO CATALOGUE
2012**

ICONS



Wood Construction

Carpentry, timber frame construction, remodeller solutions such as battens, mouldings, constructive connections, thermal insulation systems, frame connections, steel sheets, shingles, flooring.



Drywall

Screw connections in the static and nonstatic applications such as gypsum board to metal or wood, gypsum fibre boards on wood substructure, sound insulation.



General Joinery

Carpentry, assembly, stair construction, windows, doors, interior design, furniture boards, panelling, profile boards, panels, tongue & groove, furniture, flooring, ceiling, wall fittings, decking, glazing bead.



Display

Exhibition construction, point of sale items, packaging, display boxes, upholstery work, fixing fabrics, leather.



Furniture

Furniture frames, drawer assembly, cabinets, upholstery.



Pallet Industry

Manufacture and repair of boxes, box parts, stalls, single and multiple-way pallets, product and shipping packaging.



Roofing/Sheathing

Substructures, panels, facade and roof production, roof and facade shingles, slides, roof panels.



Automotive

Seat manufacture, upholstery.



Upholstery

For the fixing of foam and textiles to each other or on other substrates.



Packaging

Packaging, boxes, crates, cardboard packaging.



Bedding

Divan, Mattress and Headboard manufacturing



Steel

Steel applications



Concrete

Concrete applications



All Senco EMEA. Tools are marked with the CE-mark, and therefore meet the strict European CE regulations. On request we can provide you with specific sound and vibration information of specific tools.



1 year limited warranty after date of purchase and applies to defects in material and production, excluding wearing parts, problems due to lack of maintenance, overload and usage of non-Senco parts and/or fasteners.



2 year limited warranty after date of purchase and applies to defects in material and production, excluding wearing parts, problems due to lack of maintenance, overload and usage of non-Senco parts and/or fasteners.



5 year limited warranty after date of purchase and applies to defects in material and production, excluding wearing parts, problems due to lack of maintenance, overload and usage of non-Senco parts and/or fasteners.



The tool will be delivered in a case



The tool is also available in a case



The tool is powered by a fuel cell



FUSION TECHNOLOGY

Senco nailers with Fusion Technology use compressed air that is permanently sealed in the tool's self-contained, built-in cylinder to unleash a shot of pure, portable pneumatic power every time you pull the trigger. You don't need to buy costly gas cells. There's no smelly exhaust, no ramp up time and virtually no cleaning or servicing costs.

GAS TECHNOLOGY

Senco Gas tools have proven their cordless convenience in a variety of applications, ranging from wood construction to 2nd fix applications.

PERFORMANCE. POWER.
PRODUCTIVITY.

SENCO[®]



CORDLESS

Cordless convenience,
pneumatic power

STRIPNAILERS

F-18 Fusion Brad nailer



F-16A Fusion 20° Finish nailer



F-16S Fusion Finish nailer



TECHNICAL INFORMATION

Length	279 mm
Width	76 mm
Height	343 mm
Weight	2,7 kg
Actuation	Dual
Battery	18V 1,1 Ah Li-ion
Recharge time	45 min
Magazine capacity	110

APPLICATIONS


Molding and decorative trim, furniture trim, window beading, blind pinning of upholstered and trim panels, rattan, scribe molding, cabinets, drawers and picture frame assembly

FEATURES

- Fusion cordless pneumatic technology
- Adjustable depth of drive
- 18V Li-ion battery
- Selectable trigger

ART. NR. DESCRIPTION

6E2001N Fusion FN55AX Dual + Case



TECHNICAL INFORMATION

Length	279 mm
Width	76 mm
Height	330 mm
Weight	2,7 kg
Actuation	Dual
Battery	18V 1,1 Ah Li-ion
Recharge time	45 min
Magazine capacity	100

APPLICATIONS


All 2nd-fix applications including architrave, dado, skirting, casings, baseboards, frames

FEATURES

- Fusion cordless pneumatic technology
- Adjustable depth of drive
- 18V Li-ion battery
- Selectable trigger

ART. NR. DESCRIPTION

5P2001N Fusion FN65RHA Dual + Case



TECHNICAL INFORMATION

Length	330 mm
Width	76 mm
Height	330 mm
Weight	2,7 kg
Actuation	Dual
Battery	18V 1,1 Ah Li-ion
Recharge time	45 min
Magazine capacity	100

APPLICATIONS


All 2nd-fix applications including architrave, dado, skirting, casings, baseboards, frames

FEATURES

- Fusion cordless pneumatic technology
- Adjustable depth of drive
- 18V Li-ion battery
- Selectable trigger

ART. NR. DESCRIPTION

6U2001N Fusion FN65RHS Dual + Case



F-15 Fusion 34° Finish nailer



GT50AX Brad nailer



GT65RHA 20° Finish nailer



TECHNICAL INFORMATION

Length	330 mm
Width	76 mm
Height	348 mm
Weight	2,8 kg
Actuation	Dual
Battery	18V 1,1 Ah Li-ion
Recharge time	45 min
Magazine capacity	110

APPLICATIONS


Finish and trim, baseboard, cabinets and caskets, chair rail, decorative trim, door & window, casing, furniture trim, paneling

FEATURES

- Fusion cordless pneumatic technology
- Adjustable depth of drive
- 18V Li-ion battery
- Selectable trigger

ART. NR. DESCRIPTION

5N2001N Fusion FN65DA Dual + Case



TECHNICAL INFORMATION

Length	320 mm
Width	86 mm
Height	285 mm
Weight	2,3 kg
Actuation	Restrictive
Battery	6V 1,5 Ah Ni-MH
Recharge time	2 hours
Fuel cell	18g (31,5x80 mm)
Magazine capacity	100

APPLICATIONS


Molding and decorative trim, furniture trim, window beading, blind pinning of upholstered and trim panels, rattan, scribe molding, cabinets, drawers and picture frame assembly

FEATURES

- High voltage ignition - clean combustion: lower maintenance
- Adjustable depth of drive
- EZ-Clear Nose
- Works in all weather conditions

ART. NR. DESCRIPTION

7R2001N GT50AX Restr. + Case



TECHNICAL INFORMATION

Length	340 mm
Width	86 mm
Height	340 mm
Weight	2,1 kg
Actuation	Restrictive
Battery	6V 1,5 Ah Ni-MH
Recharge time	2 hours
Fuel cell	18g (31,5x80 mm)
Magazine capacity	100

APPLICATIONS


All 2nd-fix applications including architrave, dado, skirting, casings, baseboards, frames

FEATURES

- High voltage ignition - clean combustion: lower maintenance
- Works in all weather conditions
- Adjustable depth of drive
- EZ-Clear Nose

ART. NR. DESCRIPTION

5S2001N GT65RHA Restr. + Case



STRIPNAILERS

GT65RHS Finish nailer



GT65DA 34° Finish nailer



GT90CH 34° Clipped head framing nailer



TECHNICAL INFORMATION

Length	312 mm
Width	86 mm
Height	300 mm
Weight	2,3 kg
Actuation	Restrictive
Battery	6V 1,5 Ah Ni-MH
Recharge time	2 hours
Fuel cell	18g (31,5x80 mm)
Magazine capacity	100

APPLICATIONS

All 2nd-fix applications including architrave, dado, skirting, casings, baseboards, frames

FEATURES

- High voltage ignition - clean combustion: lower maintenance
- Works in all weather conditions
- Adjustable depth of drive
- EZ-Clear Nose

ART. NR. DESCRIPTION

6D2001N GT65RHS Restr. + Case



TECHNICAL INFORMATION

Length	318 mm
Width	91 mm
Height	362 mm
Weight	2,4 kg
Actuation	Restrictive
Battery	6V 1,5 Ah Ni-MH
Recharge time	2 hours
Fuel cell	18g (31,5x80 mm)
Magazine capacity	110

APPLICATIONS

Finish and trim, baseboard, cabinets and caskets, chair rail, decorative trim, door & window, casing, furniture trim, paneling

FEATURES

- High voltage ignition - clean combustion: lower maintenance
- Adjustable depth of drive
- EZ-Clear Nose
- Works in all weather conditions

ART. NR. DESCRIPTION

5R2001N GT65DA Restr. + Case



TECHNICAL INFORMATION

Length	371 mm
Width	107 mm
Height	376 mm
Weight	3,6 kg
Actuation	Restrictive
Battery	6V 1,5 Ah Ni-MH
Recharge time	2 hours
Fuel cell	40g (31,5x165 mm)
Magazine capacity	70

APPLICATIONS


Timber frame, subfloors, pallets and crates, decking, shuttering, frames

FEATURES

- High voltage ignition - clean combustion: lower maintenance
- Adjustable depth of drive
- Durable metal magazine
- Comfort grip
- Works in all weather conditions

ART. NR. DESCRIPTION

5F2001N GT90CH Restr. + Case





GT90FRH

20° Full round head framing nailer



SGP40S

Concrete nailer



TECHNICAL INFORMATION

Length	371 mm
Width	107 mm
Height	376 mm
Weight	3,6 kg
Actuation	Restrictive
Battery	6V 1,5 Ah Ni-MH
Recharge time	2 hours
Fuel cell	40g (31,5x165 mm)
Magazine capacity	70

APPLICATIONS


Timber frame, subfloors, pallets and crates, decking, shuttering, frames

FEATURES

- High voltage ignition - clean combustion: lower maintenance
- Adjustable depth of drive
- Durable metal magazine
- Comfort grip
- Works in all weather conditions

ART. NR. DESCRIPTION

5G2001N GT90FRH Restr. + Case



TECHNICAL INFORMATION

Length	340 mm
Width	107 mm
Height	380 mm
Weight	4,0 kg
Actuation	Restrictive
Battery	6V 1,5 Ah Ni-MH
Recharge time	2 hours
Fuel cell	40g (31,5x165 mm)
Magazine capacity	22

APPLICATIONS

Ceiling grid to concrete, fastening of drywall track

FEATURES

- High voltage ignition - clean combustion: lower maintenance
- Adjustable depth of drive
- Interchangeable short and long magazine
- Comfort grip - reduces fatigue
- Rear loading

ART. NR. DESCRIPTION

5H9211N SGP40S Restr. + Case





- 1 **Abu Ilyas Trading**
- 2 **Aerfast**
www.vanaerdengroup.com
- 3 **Afcom Group**
www.afcom.co.za
- 4 **Affut Precis Maroc**
- 5 **Betis Distribution**
www.betis.ru
- 6 **Cerclindus**
www.vanaerdengroup.com
- 7 **Comersim**
www.gruposimes.com
- 8 **Elkum**
www.elkum-ltd.co.il
- 9 **Equip Industrial Supplies**
www.equip.ae
- 10 **H. Clausen**
www.senco.no
- 11 **Heinz Bühnen**
www.vanaerdengroup.com
- 12 **J.P. Müller**
www.jpmuellerag.ch
- 13 **Masader Multi**
www.masadermulti.com
- 14 **Mechelin**
www.mechelin-company.fi
- 15 **Ottensten**
www.ottensten.dk
- 16 **Ottensten Polska**
www.ottensten.pl
- 17 **Poppers Senco Deutschland**
www.poppers-senco.de
- 18 **Poppers Senco Makine**
www.poppers-senco.com.tr
- 19 **Poppers Senco UK**
www.poppers-senco.co.uk
- 20 **Poppers Senco Nederland**
www.poppers-senco.nl
- 21 **Romeo Maestri & Figli**
www.romeomaestri.it
- 22 **Sofragraf Senco**
www.vanaerdengroup.com
- 23 **Technical Supplies & Services**
www.tssqatar.com
- 24 **Vamvacas**
www.vamvacas.gr
- 25 **Y.Kawoosh**
www.ykawoosh.com

FOR MORE INFORMATION: WWW.SENCO-EMEA.COM

SENCO DISTRIBUTORS


EUROPE | MIDDLE EAST | AFRICA | RUSSIA

STRIPNAIL CODING CHART

1 2 3 4 5 6 7 8 9 10

Example: DA25EAB-FC

1ST DIGIT DIAMETER & GAUGE		2ND DIGIT HEAD/SHANK CONFIGURATION		3RD DIGIT LENGTH (mm) US			5TH DIGIT POINT	
A	18 ga., 1,2 mm	A	Brad head	46	35 mm	16	A	Diamond
B	2,5 mm	B	Barbed, full round head	47	40 mm	18	B	Blunt dia
C	23 ga., 0,68 mm	C	Flat head, smooth shank, clipped head	49	45 mm	19	C	Blunt
D	15 ga., 1,8 mm	D	Flat head, smooth shank, plastic collated, full round head	51	50 mm	21	D	Blunt chisel
E	2,3 mm	E	Flat head, ring shank, clipped head	52	55 mm	22	E	Sharp chisel
F	2,46 mm	F	Flat head, screw shank, clipped	54	60 mm	24	F	Chisel
G	2,87 mm	H	"T" head, smooth shank, full round head	55	65 mm	25	G	Semi-blunt
H	3,1 mm	K	Flat head, screw shank, plastic collated, full round head	56	70 mm	26	H	Clinch point
K	3,3 mm	L	Flat head, ring shank, plastic collated, full round head	57	75 mm	27		
M	3,8 mm	N	Full round head metal connector nail, aggressive ring, DIN1052	58	80 mm	28		
N	4,1 mm	P	Full round head metal connector nail, aggressive ring	59	90 mm	29		
O	4,2 mm	Q	Flat head, 1/3rd ring shank, full round head	60	100 mm	31		
P	2,2 mm	S	Flat head, ring shank, dome full round head	61	110 mm	32		
Q	3,4 mm	V	Bugle head, ring shank, metal connector 34°	62	115 mm	33		
R	1,6 mm	W	L cleat head, barded shank	63	120 mm	34		
T	4,6 mm	X	Medium head pin	64	125 mm	35		
U	2,0 mm	Y	Slight head pin	65	130 mm	36		
V	2,6 mm	Z	Headless pin	66	135 mm	37		
1	2,8 mm	5	Offset full round head, smooth	67	140 mm	38		
2	4,5 mm	6	Offset full round head, ring	68	145 mm	39		
				69	150 mm	40		
				70	160 mm	41		

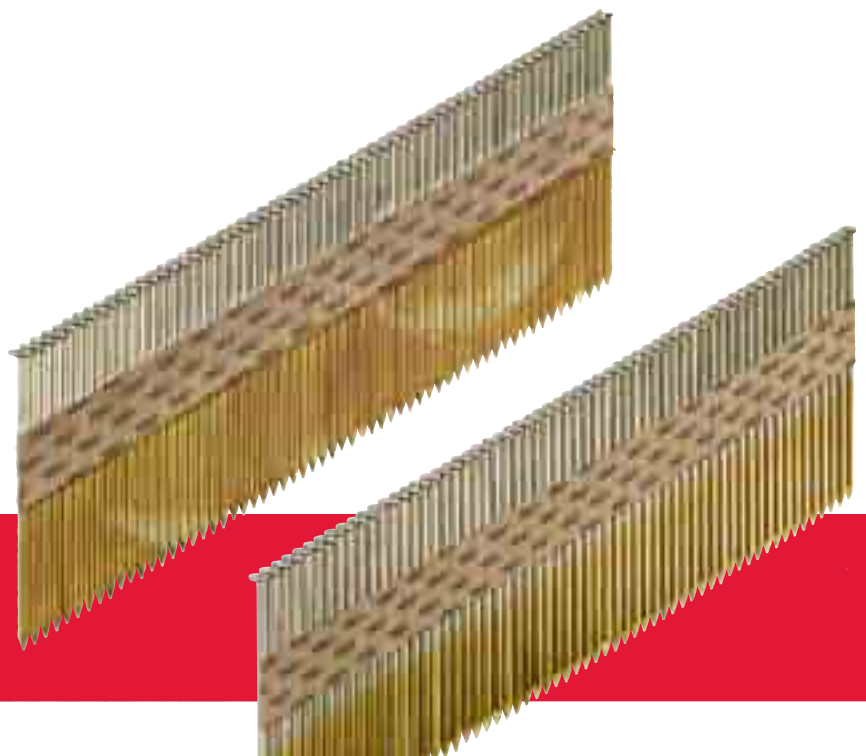

1 2 3 4 5 6 7 8 9 10


Example: DA25EAB-FC

6TH DIGIT WIRE CHEMISTRY & FINISH		7TH DIGIT FINISH		8TH DIGIT FEATURES	
A	Regular galvanised std tensile	A	Plain	E	24 Degree strip angle
B	Regular galvanised olive drab	B	Sencoted	I	Special leg feature
C	Liquor finish	C	Painted	J	Special head feature
D	"Wheatherex II" galvanised	D	Painted / sencoted	K	Short strip
E	"Everguard"	E	Coated by verdor	L	Plastic collation strip with 7,5mm pithc
G	Stainless steel, aisi 304 (a2)	S	New glue	M	Full round head nail, plastic collated 34 degree
H	Bright basic, heat-treated			N	Carton / label / count change
I	Regular galvanised, heat-treated			P	Bulk pack
J	Hot-dipped galvanised - corrossivity class 2			R	Retail packaging
K	Hot-dipped galvanised - corrossivity class 4			S	Frh, plastic collated 20 degree angled
M	Aluminium			T	Full round head nail, paper collated 20 degree angled metal connector
P	Bright basic, std tensile			X	Half strips - retail packaging
Q	Bright basic, med carbon			4	17 Degree strip angle
R	Regular galvanised, yellow chromated				
S	Hot-dipped galvanised - corrossivity class 3				
T	"Flash" galvanised or greater				
U	Stainless steel, aisi 316 (a4)				
Z	Bronze				

1 2 3 4 5 6 7 8 9 10

Example: DA25EAB-FC

9TH DIGIT SPECIAL FEATURES		10TH DIGIT OTHER	
G	Stainless steel welding wire	-FC	Fuel cell
K	Short strip	R	Retail packaging
R	Retail packaging		
W	Waterproof packaging		

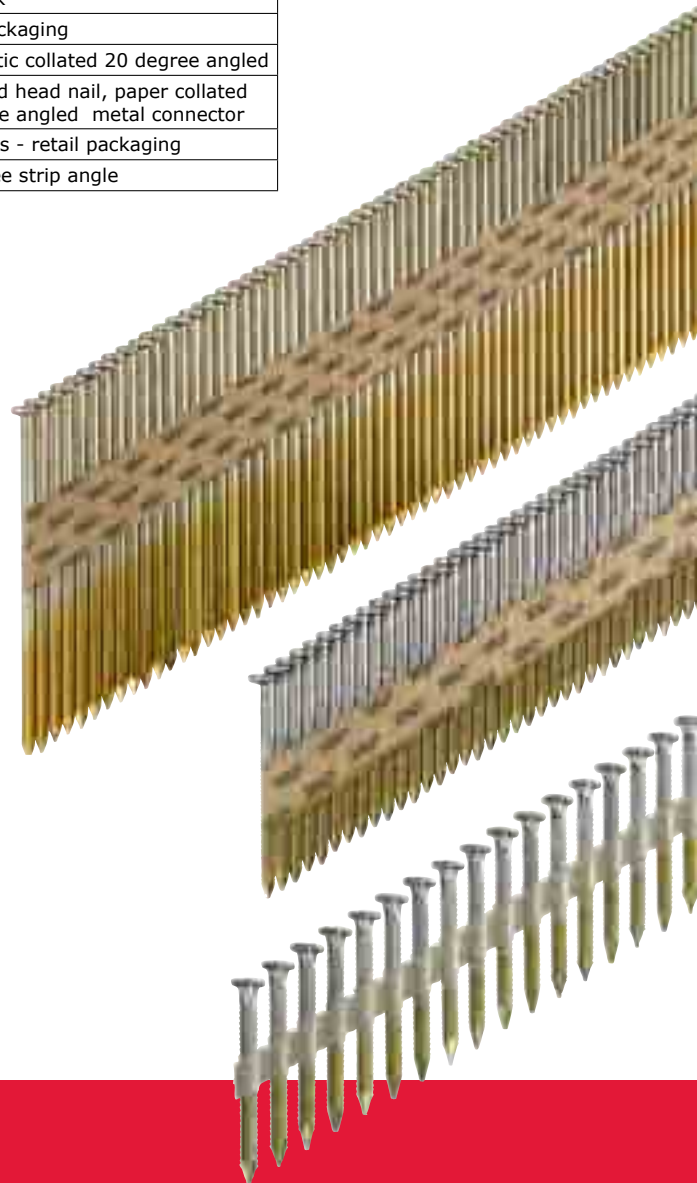

**Colofon:**

Do you have comments, an idea, an inspiring example, or news? Please let us know:

Verpa Senco B.V.

Pascallaan 88
8218 NJ Lelystad, The Netherlands
info@verpa-senco.com
(C)Copyright Verpa-Senco 2012

Editors:

Christiaan Spelmink
Vincent van de Kamp

Art Direction:

Sterckdesign
Hierden, The Netherlands

Photography:

Sonius Creative Imaging
Almere-Haven, The Netherlands

All rights reserved; No rights may be derived from the information in this publication.

PERFORMANCE. POWER.
PRODUCTIVITY.

